


2005 REC-44-446 27 MAR 2002

FORM-PTO-1390 (Rev. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 027650-976	
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5) Unassigned <b>70/088680</b>	
INTERNATIONAL APPLICATION NO. PCT/SE00/01833		INTERNATIONAL FILING DATE 21 September 2000 (21.09.2000)		PRIORITY DATE CLAIMED 22 September 1999 (22.09.1999)	
TITLE OF INVENTION <b>A METHOD OF PRODUCING A PACKAGING CONTAINER PROVIDED WITH AN OPENING ARRANGEMENT</b>					
APPLICANT(S) FOR DO/EO/US <b>LASSON, Rolf</b>					
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <ol style="list-style-type: none"> <li><input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</li> <li><input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</li> <li><input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))             <ol style="list-style-type: none"> <li><input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li><input checked="" type="checkbox"/> has been communicated by the International Bureau.</li> <li><input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li><input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2))             <ol style="list-style-type: none"> <li><input type="checkbox"/> is attached hereto.</li> <li><input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ol> </li> <li><input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))             <ol style="list-style-type: none"> <li><input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li><input type="checkbox"/> have been communicated by the International Bureau.</li> <li><input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li><input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li><input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li><input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li><input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol> <p><b>Items 11 to 20 below concern document(s) or information included:</b></p> <ol style="list-style-type: none"> <li><input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li><input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li><input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.</li> <li><input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li><input checked="" type="checkbox"/> A substitute specification.</li> <li><input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li><input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</li> <li><input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</li> <li><input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</li> <li><input checked="" type="checkbox"/> Other items or information:</li> </ol> <p>Publ. Appln. No. WO 01/21390; Three (3) sheets of drawings; PCT forms IPEA/401 and ISA/210; U.S. Format Specification (without claims) (Substitute Specification); CompareRite® Specification (without claims).</p>					



21839

U.S. APPLICATION NO (If known, see 37 CFR 1.53) <b>Unassigned 10/088680</b>		INTERNATIONAL APPLICATION NO <b>PCT/SE00/01833</b>		ATTORNEY'S DOCKET NUMBER <b>027650-976</b>	
21. <input checked="" type="checkbox"/> The following fees are submitted:				<b>CALCULATIONS</b>	PTO USE ONLY
<b>Basic National Fee (37 CFR 1.492(a)(1)-(5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1,040.00 (960) International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$890.00 (970) International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$740.00 (958) International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$710.00 (956) International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00 (962)					
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				\$ 1,040.00	
Surcharge of \$130.00 (154) for furnishing the oath or declaration later than 20 <input type="checkbox"/> 30 <input type="checkbox"/> months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	9 -20 =		X\$18.00 (966)	\$	
Independent Claims	2 -3 =		X\$84.00 (964)	\$	
Multiple dependent claim(s) (if applicable)			+ \$280.00 (968)	\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 1,040.00	
Reduction for 1/2 for filing by small entity, if applicable (see below).				+	\$ -
<b>SUBTOTAL =</b>				\$ 1,040.00	
Processing fee of \$130.00 (156) for furnishing the English translation later than 20 <input type="checkbox"/> 30 <input type="checkbox"/> months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE =</b>				\$ 1,040.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 (581) per property				+	\$
<b>TOTAL FEES ENCLOSED =</b>				\$ 1,040.00	
				<b>Amount to be refunded:</b>	\$
				<b>charged:</b>	\$
a. <input type="checkbox"/> Small entity status is hereby claimed. b. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1,040.00</u> to cover the above fees is enclosed. c. <input type="checkbox"/> Please charge my Deposit Account No. <u>02-4800</u> in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. d. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>02-4800</u> . A duplicate copy of this sheet is enclosed.  <b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>  SEND ALL CORRESPONDENCE TO:  Robert S. Swecker BURNS, DOANE, SWECKER & MATHIS, L.L.P. P.O. Box 1404 Alexandria, Virginia 22313-1404 (703) 836-6620					
			 SIGNATURE <b>Robert S. Swecker</b> NAME 19,885 REGISTRATION NUMBER		
			March 21, 2002 DATE		

Patent  
Attorney's Docket No. 027650-976

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of	)	
	)	
ROLF LASSON	)	Group Art Unit: Unassigned
	)	
Application No.: Unassigned	)	Examiner: Unassigned
	)	
Filed: March 21, 2002	)	
	)	
For: A METHOD OF PRODUCING A	)	
PACKAGING CONTAINER PROVIDED	)	
WITH AN OPENING ARRANGEMENT	)	

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Prior to examination of the above-captioned patent application, it is requested that this application be amended as set forth herein.

The applicants request the entry of certain amendments to the application. The amendments are incorporated in the formatted substitute specification submitted herewith. A copy of the original specification of the International Application as filed, together with a CompareRite® version showing the amendments in the original specification, in accordance with 37 C.F.R. §1.121 (2001), are submitted herewith. No new matter has been introduced in these amendments to the original specification.

**IN THE CLAIMS:**

Please replace Claims 1-9 as follows.

1. (Amended) A method of producing packages provided with an opening arrangement and of the type which has an emptying hole prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard with a liquid-tight coating of plastic, and the other side with a foil or coating of metal which serves as oxygen gas barrier and which, by means of a layer of scaling plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes in the thus coated paper or paperboard web and thereafter reforming the packaging blank provided with the holes into individual packages provided with opening arrangements, wherein the emptying-preparatory holes are made only partly through the coated paper or paperboard web from one side of the web by first cutting or burning incisions in the web along substantially closed lines in correspondence with the size, configuration and placing of each respective emptying hole on the finished packages through the outer plastic coating and paper or paperboard layer down to, but not through, the subjacent metal foil or metal coating, and thereafter removing the parts of the packaging blank located inside the incision lines for the formation of the emptying holes which, from the other side of the web, are still closed by the unruptured or intact metal foil or coating.

2. (Amended) The method as claimed in Claim 1, wherein the parts of the packaging blank located inside the incision lines are sucked or drawn away from the packaging blank with the aid of a vacuum.



3. (Amended) The method as claimed in Claim 1, wherein the packaging blank is heated selectively within the regions of the parts defined by the incision lines immediately prior to and/or in connection with these parts being removed from the packaging blank.

4. (Amended) The method as claimed in Claim 3, wherein the selective heating of the packaging blank is realized by inductive heating of the metal foil or coating in the packaging blank.

5. (Amended) The method as claimed in Claim 3, wherein the packaging blank is heated to a temperature at which the layer of sealing plastic or other adhesive wholly or at least partly melts.

6. (Amended) The method as claimed in Claim 1, wherein the packaging blank is cut by means of laser of adapted wavelength and intensity in order to cut down to, but not through, the metal foil or metal coating of the packaging blank.

7. (Amended) The method as claimed in Claim 1, wherein the packaging blank is provided with separate pull-off opening strips above the partly provided emptying holes, before the packaging blank is reformed into packages.

8. (Amended) The method as claimed in Claim 1, wherein the produced packages are provided with separate opening arrangements on the outside of the packages in the region of the prepared emptying holes.

9. (Amended) A package provided with an opening arrangement and of the type which has an emptying hole prepared in the package wall, through which the package is intended to be emptied of its contents, wherein the package is produced from a packaging material comprising a layer of paper or paperboard which, on the outside of the package, has a liquid-tight coating of plastic and, on the inside of the package, has a metal foil or coating serving as oxygen gas barrier, and that the emptying hole prepared in the package wall is closed from the inside by the unruptured or intact metal foil or coating in the packaging material.

By way of the foregoing amendments to the claims, Claims 1-9 have been amended to delete the multiple dependencies and the reference numerals, and to replace the words "characterized in that" with the word "wherein". These changes have been made in accordance with 37 C.F.R. § 1.121 as amended on November 7, 2000. Marked-up versions of Claims 1-9 indicating the changes accompany this Preliminary Amendment.


It is requested that the application be examined on the basis of the substitute specification and the claims as amended.

Early and favorable consideration with respect to this application is respectfully requested.

Should any questions arise in connection with this application, the undersigned respectfully requests that he be contacted at the number indicated below.

Respectfully submitted,

**BURNS, DOANE, SWECKER & MATHIS, L.L.P.**

By:   
Robert S. Swecker  
Registration No. 19,885

P. O. Box 1404  
Alexandria, Virginia 22313-1404  
(703) 836-6620

**Date: March 21, 2002**

**Attachment to Preliminary Amendment dated March 21, 2002**

**Marked-up Claims 1-9**

1. (Amended) A method of producing packages [(15)] provided with an opening arrangement and of the type which has an emptying hole [(23)] prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard [(13a)] with a liquid-tight coating [(13b)] of plastic, and the other side with a foil [(13d)] or coating of metal which serves as oxygen gas barrier and which, by means of a layer [(13e)] of scaling plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes [(23)] in the thus coated paper or paperboard web and thereafter reforming the packaging blank [(13)] provided with the holes into individual packages [(15)] provided with opening arrangements, [characterized in that] wherein the emptying-preparatory holes [(23)] are made only partly through the coated paper or paperboard web [(13)] from one side of the web by first cutting or burning incisions [(22)] in the web along substantially closed lines in correspondence with the size, configuration and placing of each respective emptying hole [(23)] on the finished packages [(15)] through the outer plastic coating [(13b)] and paper or paperboard layer [(13a)] down to, but not through, the subjacent metal foil [(13d)] or metal coating, and thereafter removing the parts [(21)] of the packaging blank located inside the incision lines [(22)] for the formation of the emptying holes [(23)] which, from the other side of the web, are still closed by the unruptured or intact metal foil [(13d)] or coating.

**Attachment to Preliminary Amendment dated March 21, 2002**

**Marked-up Claims 1-9**

2. (Amended) The method as claimed in Claim 1, [characterized in that] wherein the parts [(21)] of the packaging blank [(13)] located inside the incision lines [(22)] are sucked or drawn away from the packaging blank with the aid of a vacuum.

3. (Amended) The method as claimed in Claim 1 [or 2], [characterized in that] wherein the packaging blank [(13)] is heated selectively within the regions of the parts [(21)] defined by the incision lines [(22)] immediately prior to and/or in connection with these parts being removed from the packaging blank [(13)].

4. (Amended) The method as claimed in Claim 3, [characterized in that] wherein the selective heating of the packaging blank [(13)] is realized by inductive heating of the metal foil [(13d)] or coating in the packaging blank.

5. (Amended) The method as claimed in Claim 3 [or 4], [characterized in that] wherein the packaging blank [(13)] is heated to a temperature at which the layer [(13e)] of sealing plastic or other adhesive wholly or at least partly melts.

6. (Amended) The method as claimed in [any of the preceding Claims] Claim 1, [characterized in that] wherein the packaging blank [(13)] is cut by means of laser [(20)] of

**Attachment to Preliminary Amendment dated March 21, 2002**

## Marked-up Claims 1-9

adapted wavelength and intensity in order to cut down to, but not through, the metal foil [(13d)] or metal coating of the packaging blank.

7. (Amended) The method as claimed in [any of the preceding Claims] Claim 1, [characterized in that] wherein the packaging blank [(13)] is provided with separate pull-off opening strips above the partly provided emptying holes [(23)], before the packaging blank [(13)] is reformed into packages [(15)].

8. (Amended) The method as claimed in [any of Claims 1 to 6] Claim 1, [characterized in that] wherein the produced packages [(15)] are provided with separate opening arrangements on the outside of the packages in the region of the prepared emptying holes [(23)].

9. (Amended) A package [(15)] provided with an opening arrangement and of the type which has an emptying hole [(23)] prepared in the package wall, through which the package is intended to be emptied of its contents, [characterized in that] wherein the package is produced from a packaging material comprising a layer [(13a)] of paper or paperboard which, on the outside of the package, has a liquid-tight coating [(13b)] of plastic and, on the inside of the package, has a metal foil [(13d)] or coating serving as oxygen gas barrier, and that

## Marked-up Claims 1-9

the emptying hole [(23)] prepared in the package wall is closed from the inside by the unruptured or intact metal foil [(13d)] or coating in the packaging material.

**A METHOD OF PRODUCING A PACKAGING CONTAINER PROVIDED  
WITH AN OPENING ARRANGEMENT**

**TECHNICAL FIELD**

5           The present invention relates to a method of producing packages provided with an opening arrangement and of the type which has an emptying hole prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard with a liquid-tight coating of plastic, and the other  
10 side with a foil or coating of metal which serves as oxygen gas barrier and which, by means of a layer of sealing plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes in the thus coated paper or paperboard web and thereafter reforming the packaging blank provided with the hole into individual packages provided with an opening  
15 arrangement.

**BACKGROUND ART**

          Within the packaging industry, use is now often made of packages of single-use disposable type for the transport and handling of liquid foods, and a  
20 very large group of these so-called single-use disposable packages is produced from a packaging laminate which comprises a paper or paperboard layer and liquid-tight coatings of plastic on both sides of the paper or paperboard layer. Examples of commercial packages of this type are TETRA BRIK® and TETRA REX®.

25           For foods which have a relatively rapid turnover in retail outlets and, as a result, relatively short shelf-life in their package, a packaging laminate solely of paper or paperboard and outer liquid-tight coatings of plastic is often sufficient to impart to the packed food the requisite product protection throughout its entire storage life from filling to consumption. On the other hand, for more perishable  
30 and storage-sensitive foods which are intended to be able to be stored for a relatively lengthy period of time in their packages, it is necessary that the packaging laminate be supplemented with at least one additional layer in order to make for extended shelf-life. In particular, it is necessary that the package be



sufficiently tight in order, during the entire storage life of the packed food in its unopened package, to prevent the penetration of oxygen gas which could very rapidly cause deterioration in the food if it came into contact with the food.

In order to make for the packing of such perishable, storage- and oxygen gas-sensitive foods with extended shelf life, the packaging laminate is therefore normally supplemented with at least one additional layer of metal or plastic of other type than that employed in the outer plastic coatings of the packaging laminate. The most common packaging laminate for this purpose includes, as the above-mentioned additional layer, an aluminium foil which is practically entirely impermeable to oxygen gas and which, moreover, possesses the advantageous property that it makes possible inductive thermosealing which is a simple, but efficient method of rapidly obtaining mechanically strong and tight sealing joints or seams when the sheet- or web-shaped packaging blank is reformed during the package production operation.

In addition to the requisite mechanical and physical properties so as to make for lengthy storage of foods with good shelf life, it is also desirable from the point of view of the consumer that the package can be easy to open when it is time to empty the package of its contents. In order to satisfy this need and provide a conveniently openable package, the package is therefore provided with some type of arrangement which facilitates opening and which may either be integral in or be a separate part of the package.

An extremely well-known and well-functioning opening arrangement includes an emptying hole prepared in the paper or paperboard layer of the package wall and which is closed from inside and outside by respective surrounding layers in the package wall. In order to facilitate exposure of the emptying hole when the package is to be opened, the opening arrangement normally includes a separate opening strip fixedly secured on the outside of the package wall and whose removal entails that the subjacent part of the package wall is entrained and torn off along the incision edges of the hole so that the entire hole is exposed.

Other types of exteriorly applied opening arrangements for facilitating exposure of an emptying hole prepared in the package wall are also known in the art, but since they do not constitute a germane part of the present invention, they

need not be described in greater detail here in order to understand the present invention.

A packaging blank for a packaging container of the type described by way of introduction is produced, according to a conventional method, from a rolled web of paper or paperboard. The rolled web is unwound from the reel and is led through a printing station where the web is provided with the desired decorative artwork and possibly other printing markings relevant for subsequent web operations. The printed web is thereafter led further to a mechanical processing station where the web, in a per se known manner, is given the desired pattern of crease lines and also provided with through-going holes of the desired size and configuration which correspond with the emptying opening of the finished package. From the processing station, the web is thereafter led further to a coating station where the web is coated on both its sides with liquid-tight plastic coatings, and possibly additional layers necessary for the packaging purpose, e.g. an aluminium foil (Alifoil) in that case when the web is later to be used for the production of packages for, for instance, oxygen gas-sensitive products. Finally, from the coating station, the web is wound up on package magazine reels for storage or further transport to a packing machine where the web is supplemented with separate opening details in the areas of the prepared emptying hole, and is thereafter formed, filled and sealed to form individual consumer packages provided with an opening arrangement.

Packages produced according to this conventional method generally function well in those cases when the packaging laminate merely consists of paper or paperboard and outer coatings of plastic, while corresponding packages in which the packaging laminate also includes an aluminium foil show a tendency to lose tightness properties against oxygen gas or right from the outset display deteriorating tightness properties against oxygen gas, in particular within the area of the emptying hole prepared in the package wall. While the packages in most cases maintain sufficient oxygen gas tightness to impart to the packed product satisfactory protection during at least a major part of the storage life of the product in the unopened package, it is naturally a need in the art to be able to produce packages which right from the outset display a high level of oxygen gas tightness

which, moreover, is maintained during the remaining part of the storage life of the product in its package.

According to another conventional method, packaging containers provided with an opening arrangement are produced from a similar packaging blank to that described above, but which, unlike the previous packaging blank, is not provided with any through-going emptying hole before the coating with the additional layer of plastic and aluminium. In this case, the emptying-preparatory holes are made on the ready-coated packaging blank by means of punching tools in connection with the packing and filling machine, whereafter the thus provided holes are closed with the aid of an applicator which applies a sealing plastic patch or strip over the hole before the packaging blank is led in and reformed into packages in the packing and filling machine.

Packages produced according to this conventional method function well also in that case when the packaging laminate includes an aluminium foil, and such packages are moreover conveniently openable, but one serious drawback is that the method requires extremely accurate register maintenance and therefore complicated technical equipment in order to place the emptying holes in the correct position in relation to the printed artwork and crease line pattern of the packaging blank and in order to apply the sealing plastic patch or plastic strip in such a manner that it impenetrably but tightly seals the hole provided in the package wall.

## OBJECTS OF THE INVENTION

One object of the present invention is therefore to provide an indication of how the above-described shortcomings and drawbacks inherent in the prior art technology may be obviated or at least considerably reduced.

A further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, of the type described by way of introduction which, unlike the prior art packaging containers, right from the outset display an oxygen gas tightness which is sufficiently high and stable so as to make possible long-term storage of a perishable, storage- and oxygen gas-sensitive product with good shelf life.

Yet a further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, with increased flexibility for an individual manufacturer of packages.

## 5 SOLUTION

These objects are attained according to the present invention by the method as defined in appended Claim 1.

One key difference between the method according to the present invention and the former method as described above is, thus, that the provision of  
10 the emptying hole in the method according to the present invention is to take place on the ready-produced packaging blank, and hence not only on the paper or paperboard web in connection with the production of the packaging blank, as in the prior art conventional method.

One key difference between the method according to the present invention and the second conventional method as described above is further that  
15 the emptying holes, in the method according to the present invention, are made only partly through the packaging blank, i.e. from the one side of the packaging blank through the outer plastic coating and the paper or paperboard layer down to, but not through, the subjacent aluminium foil which, thus, together with the outer  
20 plastic coating on the other side of the packaging blank, remain unpenetrated or intact on the packaging blank.

As a result of this unique partial hole provision on the finished packaging blank, inter alia the advantage will be afforded that the unruptured or intact aluminium foil (which is nevertheless already present in the packaging  
25 blank) can effectively be utilised for oxygen gas-tight closure of the emptying hole which, granted, can but need not be closed separately with an extra plastic strip or plastic patch as in the prior art method.

The deteriorated oxygen gas-tightness in prior art packages provided with opening arrangements of the above-described type, in particular in the region  
30 of the emptying opening prepared in the package wall is because of the fact that it has been difficult, for process-related reasons, to achieve a strong internal bonding of the individual layers included in the packaging laminate, i.e. the aluminium foil and the plastic, within this region. When the paper or paperboard web with holes

provided is coated with aluminium foil and plastic, and is, in connection with, or immediately after such coating led through the nip between a press roller and a counter-pressure roller in order, under pressure, to compress and bond the layers to one another, the necessary compression pressure against the web is attained  
5 only in those web areas which are not hole-punched, i.e. where the web is wholly continuous, while but a lower (insufficient) pressure is attained in remaining areas of the web, i.e. in the regions of the punched holes.

On the other hand, in the method according to the present invention, where the paper or paperboard web lacks the provision of holes, the same  
10 requisite pressure can be attained transversely across the entire web and within all regions of the web.

The partial provision of the emptying-preparatory holes in the well-integrated packaging web according to the present invention may be put into effect mechanically with the aid of punching tools which, at selected points,  
15 punch or cut incision lines of the same size and configuration as the desired emptying opening down to a pre-set depth in the packaging web, e.g. down to the aluminium foil beneath the paper or paperboard layer, whereafter the web portions defined by the incision lines (so-called confetti) are removed from the web for the formation of partly provided emptying holes on the upper side of the packaging  
20 web.

According to the present invention, the partly provided emptying holes are preferably realised with the aid of laser equipment which directs a cutting laser beam along a line corresponding to the opening configuration of the emptying opening down to the desired depth in the packaging material, i.e.  
25 through the plastic coating and the paper or paperboard layer down to the subjacent aluminium foil, from the one side of the packaging web. The advantage in laser cutting as compared with mechanical punching is that laser cutting is mechanically contactless with the moving packaging web and therefore does not involve any moving mechanical components which are worn as a result of  
30 physical contact with the moving packaging web or with any other moving machine part. A further major advantage is that a laser beam is easy to direct and set to the desired cutting depth during ongoing processing, without the need to stop the packaging web or otherwise arrest operation.

The parts of the packaging web defined by the incision lines are thereafter removed in a conventional manner by means of vacuum which sucks or draws off these from the packaging web and leaves the partly through-going holes in the packaging web.

5 In order to facilitate this removal by suction or drawing of the confetti from the packaging web, heat is applied to the web simultaneously within the pertinent confetti regions, whereby the sealing plastic or adhesive between the paper or paperboard layer and the aluminium foil is melted and, as a result, the confetti may more easily release its grip on the subjacent aluminium foil.

10 Preferably, the packaging web is heated within the selected regions by induction heating which is an efficient and reliable heating method also at extremely high web speeds.

The partly through-going emptying holes in the packaging web can thereafter be sealed with separate opening strips which are fixedly sealed on the one side of the packaging web in a mechanically strong, but rupturable sealing joint around the entire opening contour of the hole. Alternatively, or in addition, the exposed fibre incision edges may be impregnated or covered with a water-repellent coating prior to the application of the opening strips.

15 According to the present invention, it is further possible, possibly after a preceding impregnation of the exposed fibre incision edges within the regions of the provided emptying holes, to form, fill and seal packages from the hole-provided packaging web and thereafter apply separate, e.g. injection moulded arrangements above each respective emptying hole on each individual package in connection with the package's departing from the packing and filling machine.

25 Such opening arrangements are known to persons skilled in the art and occur in a multiplicity of different variations and, therefore, need not be described in greater detail in this context.

Further advantageous details and characterising features of the present invention will be apparent from the following detailed description with reference to the accompanying Drawings.

30 Fig. 1 is a block diagram which, in highly simplified form, shows the two main stations 10 and 20 involved for carrying the method according to the present invention into effect, as well as how these two main stations are

interrelated with each other. In the illustrated block diagram in Fig. 1, reference numeral 10 generally refers to a first main station or conversion plant, where sheet- or web-shaped packaging blanks are produced in per se conventional manner and using per se conventional means for further transport to a second  
5 main station 20 where the sheet- or web-shaped packaging blanks are, with the aid of packing and filling machines, finally reformed into finished consumer packages. The two main stations 10 and 20 may be in line with each other, but are, in practice, always located at geographically wholly separate sites from one another, as intimated by the broken division line between the two stations.

10 Fig. 2 is a block diagram of the first main station 10 for producing a rolled web-shaped packaging blank with the desired decorative artwork and desired pattern of crease lines facilitating folding. The first main station 10 in the illustrated generic example includes a first processing station 11 and a second processing or coating station 12 which together produce the web-shaped  
15 packaging blank from a magazine reel 13' of paper or paperboard shown furthest to the left in Fig. 2.

From the magazine reel 13', a paper or paperboard web 13 is unwound and is led into the first processing station 11 where the web is provided on its one side with the desired decorative artwork of printing ink, and also  
20 control- or process markings relevant to subsequent processing operations of the web, at the same time as the web 13 is also provided in a conventional manner with the desired pattern of crease lines which facilitate folding.

From the first processing station 11, the web 13 is led to the second processing station 12 where the web is coated on its one side with plastic,  
25 preferably polyethylene, and on its other side with an aluminium foil which serves as gas barrier and which is bonded to the paper or paperboard layer of the web by a layer of sealing plastic or other suitable adhesive applied between the paper or paperboard layer and the aluminium foil. At the same time, the web is coated with at least one additional layer of plastic in order to cover the exposed aluminium foil  
30 and produce a web-shaped, oxygen gas- and liquid-tight packaging blank 13 which is thereafter wound up on a finished packaging magazine reel 13".

From the main station 10, possibly after intermediate storage, the finished packaging magazine reel 13" is thereafter transported to the second main

station 20 for the production of packages provided with easily opened opening arrangements.

Fig. 3 is a general block diagram of the second main station 20 which, in the illustrated embodiment, comprises a packing and filling machine 14 of the type which, from a sheet- or web-shaped packaging blank, both forms, fills and seals finished packages 15. The packing and filling machine 14 further displays, at its infeed end, an apparatus 16 for cutting through the packaging blank along a substantially closed line whose size, configuration and placing correspond to the contours and placing of an emptying opening prepared in the finished package. After, or in connection with the apparatus 16, the packing and filling machine moreover displays an apparatus 17 by means of which the parts (the confetti) of the packaging blank defined by the incision lines are removed for the formation of emptying holes which are partly through-going in the packaging blank.

In operation, the web-shaped packaging blank 13 is unwound from the magazine reel 13" placed at the infeed end of the packing and filling machine 14 and is led to the apparatus 16 where the packaging blank is provided with incisions in register with the pre-printed decorative artwork and the crease line pattern of the packaging blank along a substantially closed line which extends from the one side of the packaging blank through the one outer plastic coating and the paper or paperboard layer down to the subjacent aluminium foil. From the apparatus 16, the packaging blank 13 is led further the apparatus 17 where the parts of the packaging blank defined by the incision lines are removed for the formation of partly through-going emptying holes in the packaging blank, before this is led into the packing and filling machine 14 proper for the production of filled, sealed packages 15 with opening arrangements including emptying holes provided in the package wall.

The apparatus 16 for applying emptying-preparatory incision lines in the packaging blank may be a conventional punching tool which is configured and adjusted such that it cuts in incision lines to the desired depth in the passing packaging blank.

According to the present invention, the apparatus 16 is preferably a laser apparatus which directs a laser beam of such intensity and wave length at the packaging blank that the beam cuts through the outer plastic coating and the paper



or paperboard web down to, but not through, the aluminium foil from the one side of the packaging blank. A laser apparatus enjoys the major advantage over a mechanical punching tool that it reliably cuts down to the desired depth in the packaging blank and that, moreover, it can rapidly and readily be switched for cutting incision lines of optional size and configuration, without the process  
5 needing to be arrested for this switching operation.

The apparatus 17 for removing the parts of the packaging blank enclosed by the incision lines includes or is connected to a vacuum source with the aid of which the parts are sucked or drawn free from the packaging blank for the formation of emptying holes partly through-going in the packaging blank and  
10 which, from the other side of the packaging blank, are closed by the intact or unruptured aluminium foil.

A more reliable and efficient removal by suction or drawing of the confetti is attained according to the present invention if the packaging blank, in connection with the removal operation, is selectively heated within the relevant  
15 hole regions in such a manner that the sealing plastic or adhesive between the paper or paperboard layer and the aluminium foil wholly or at least partly melts and the bond between the paper or paperboard layer and the aluminium foil is thereby weakened.

Since the packaging blank 13 includes aluminium, the bond-breaking heating may be readily realised by induction heating of the aluminium foil with the aid of conventional induction heater elements which rapidly heat the packaging blank to a temperature corresponding to or slightly exceeding the melting temperature of the relevant sealing plastic.  
20

As was described previously, the packing and filling machine 14 may also include an applicator (not shown) in association with or immediately after the confetti-removing apparatus 17 in order to apply a separate opening strip or the like over the exposed end of the partly provided emptying hole. Alternatively, the packing and filling machine 14 may include an apparatus (not shown) for  
25 applying a water-repellent impregnation agent for covering and protecting the exposed fibre incision edges within the regions of the above-mentioned emptying holes.  
30

Finally, the packing and filling machine 14 may also be equipped with or connected to an apparatus (not shown) placed at the discharge end of the packing and filling machine and with which separate opening arrangements may be applied on the finished packages over the (possibly covered) emptying holes prepared in the package wall.

Suitable opening arrangements for this purpose are previously known to persons skilled in the art and occur in a multiplicity of different forms and configurations. Each type of such opening arrangement capable of facilitating puncturing and/or removal of the arrangements sealing the hole, including the aluminium foil, may be employed in the present invention.

With reference to Figs. 4 and 5 A-5C, one particularly preferred embodiment of the method according to the present invention will now be described in connection with a packaging blank of a laminated packaging material with the structure which is schematically shown in Fig. 4. The same reference numerals as previously employed have been employed for the same or corresponding components in Figs. 4 and 5. However, in certain cases lower case letters have been added after the reference numeral in order to designate separate parts of the relevant components.

Fig. 4 thus schematically shows a cross section of a sheet- or web-shaped packaging blank of a laminated packaging material carrying the generic reference numeral 13. The packaging blank 13 includes, in this example, a paper or paperboard layer 13a and outer, liquid-tight coatings 13b and 13c on both sides of the paper or paperboard layer 13a. Between the paper or paperboard layer 13a and the one outer plastic coating 13c, the packaging blank has an aluminium foil 13d which serves as oxygen gas barrier and which is bonded to the paper or paperboard layer 13a by means of an interjacent layer 13e of sealing plastic or adhesive of known type. The paper or paperboard layer 13a further has decorative artwork 13f of printing ink which is covered by, but visible through, the outer plastic coating 13b on the other side of the packaging blank 13. While not being particularly shown in Fig. 4, the packaging blank 13 is moreover provided with the desired pattern of crease lines which facilitate folding, and also process-related control markings, so-called bar codes, in register with the printed decorative artwork.

A web-shaped packaging blank 13 with the structure illustrated in Fig. 4 is processed according to the preferred embodiment of the present invention in the manner which is schematically illustrated in Figs. 5A-5C for producing packages provided with opening arrangements of the type which has an emptying hole prepared in the package wall through which the packages are intended to be emptied of their contents.

The web-shaped packaging blank 13 is unwound from a magazine reel 13" placed at the packing and filling machine 14 (Fig. 3), and is led to a laser apparatus 16 which directs a laser beam 20 (Fig. 5A) of adjustable wavelength and intensity at the one side of the passing packaging laminate 13 in order to cut an incision along a line corresponding to the desired opening contour of the emptying hole in the package wall. By the correct setting of the wavelength and intensity of the laser beam 20, the laser beam 20 burns or cuts through the outer plastic coating 13b and the paper or paperboard layer 13a down to, but not through, the subjacent aluminium foil 13d. Such apparatuses equipped with adjustable laser beams are well-known to persons skilled in the art and are not likely to need any detailed description here.

The thus incised packaging blank 13 is thereafter led further to the confetti-removing apparatus 17 (Fig. 3) where those parts 21 of the packaging blank which are defined by the incision lines 22 are removed by suction or drawing off by means of vacuum (schematically illustrated by arrows in Fig. 5C) for the formation of emptying holes 23 partly through-going in the packaging blank 13 and closed from beneath by the intact aluminium foil 13d of the packaging blank 13, including the outer plastic coating 13c.

In order to facilitate and make for a reliable removal of the parts 21 from the packaging blank 13 by suction or drawing, the packaging blank is heated immediately prior to or in connection with this suction or drawing operation, as illustrated in Fig. 5B, by selective induction heating by means of induction heater elements 24 which heat the aluminium foil 13d directly to a suitable temperature for melting or softening the layer 13e of sealing plastic or other suitable adhesive. As a result of this induction heating, moisture present in the packaging blank (moisture content of approx. 5-7%) is forced down towards the aluminium foil,

where the moisture reverses and, by a so-called blistering phenomenon, assists in releasing the confetti fraction 21 from the packaging blank 13.

The combination of laser cutting and removal by suction or drawing during simultaneous heating of the packaging blank within selected areas in the method according to the present invention enjoys the unique advantage that it may be applied on a running packaging web without requiring any complicated extra equipment for guiding the cutting laser beam in register with the pre-printed decorative artwork and the crease lines of the packaging blank. Moreover, it ensures an efficient and rapid processing of the packaging web at the same time as it has an inherent ability to be able to be adapted for accommodating varying types and configurations of emptying holes while in ongoing operation, without the packaging web needing to be stopped or operation otherwise needing to be disrupted for such a switching operation.




It will thus be apparent from the foregoing description that the present invention satisfies the previously established objects and needs and makes for the production of packages provided with emptying arrangements in a simple, efficient manner using existent conventional equipment. While the present invention has been described in particular with reference to a packaging blank including an aluminium foil serving as a gas barrier, the present invention is naturally not restricted exclusively to such packaging blanks. Instead of an aluminium foil, the packaging blank could just as well include a coating of aluminium applied by vacuum deposition. To a person skilled in the art, it will further be obvious that other metals than aluminium may also be employed as gas barrier in the packaging blank, without departing from the inventive concept as this is defined in the appended Claims.

**WHAT IS CLAIMED IS:**


1. A method of producing packages (15) provided with an opening arrangement and of the type which has an emptying hole (23) prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard (13a) with a liquid-tight coating (13b) of plastic, and the other side with a foil (13d) or coating of metal which serves as oxygen gas barrier and which, by means of a layer (13e) of sealing plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes (23) in the thus coated paper or paperboard web and thereafter reformatting the packaging blank (13) provided with the holes into individual packages (15) provided with opening arrangements, **characterised in that** the emptying-preparatory holes (23) are made only partly through the coated paper or paperboard web (13) from one side of the web by first cutting or burning incisions (22) in the web along substantially closed lines in correspondence with the size, configuration and placing of each respective emptying hole (23) on the finished packages (15) through the outer plastic coating (13b) and paper or paperboard layer (13a) down to, but not through, the subjacent metal foil (13d) or metal coating, and thereafter removing the parts (21) of the packaging blank located inside the incision lines (22) for the formation of the emptying holes (23) which, from the other side of the web, are still closed by the unruptured or intact metal foil (13d) or coating.
2. The method as claimed in Claim 1, **characterised in that** the parts (21) of the packaging blank (13) located inside the incision lines (22) are sucked or drawn away from the packaging blank with the aid of a vacuum.
3. The method as claimed in Claim 1 or 2, **characterised in that** the packaging blank (13) is heated selectively within the regions of the parts (21) defined by the incision lines (22) immediately prior to and/or in connection with these parts being removed from the packaging blank (13).
4. The method as claimed in Claim 3, **characterised in that** the selective heating of the packaging blank (13) is realised by inductive heating of the metal foil (13d) or coating in the packaging blank.

5. The method as claimed in Claim 3 or 4, **characterised in that** the packaging blank (13) is heated to a temperature at which the layer (13e) of sealing plastic or other adhesive wholly or at least partly melts.
6. The method as claimed in any of the preceding Claims, **characterised in**  
5 **that** the packaging blank (13) is cut by means of laser (20) of adapted wavelength and intensity in order to cut down to, but not through, the metal foil (13d) or metal coating of the packaging blank.
7. The method as claimed in any of the preceding Claims, **characterised in**  
10 **that** the packaging blank (13) is provided with separate pull-off opening strips above the partly provided emptying holes (23), before the packaging blank (13) is reformed into packages (15).
8. The method as claimed in any of Claims 1 to 6, **characterised in that** the produced packages (15) are provided with separate opening arrangements on the outside of the packages in the region of the prepared emptying holes (23).
- 15 9. A package (15) provided with an opening arrangement and of the type which has an emptying hole (23) prepared in the package wall, through which the package is intended to be emptied of its contents, **characterised in that** the package is produced from a packaging material comprising a layer (13a) of paper or paperboard which, on the outside of the package, has a liquid-tight coating  
20 (13b) of plastic and, on the inside of the package, has a metal foil (13d) or coating serving as oxygen gas barrier; and that the emptying hole (23) prepared in the package wall is closed from the inside by the unruptured or intact metal foil (13d) or coating in the packaging material.


1/3

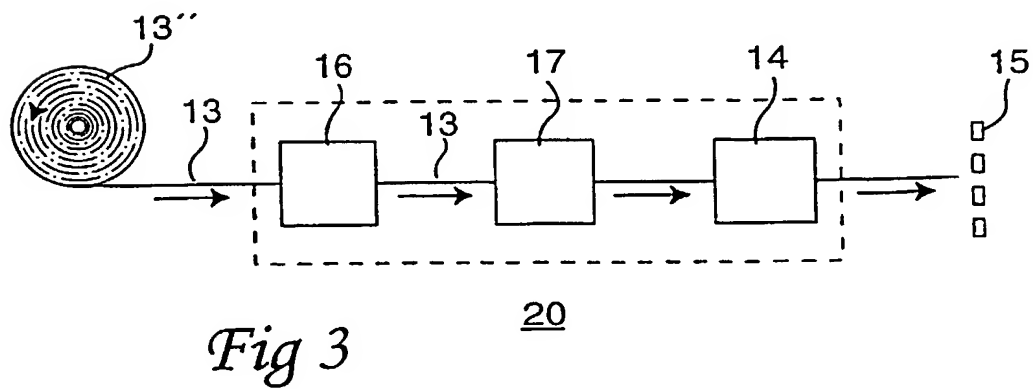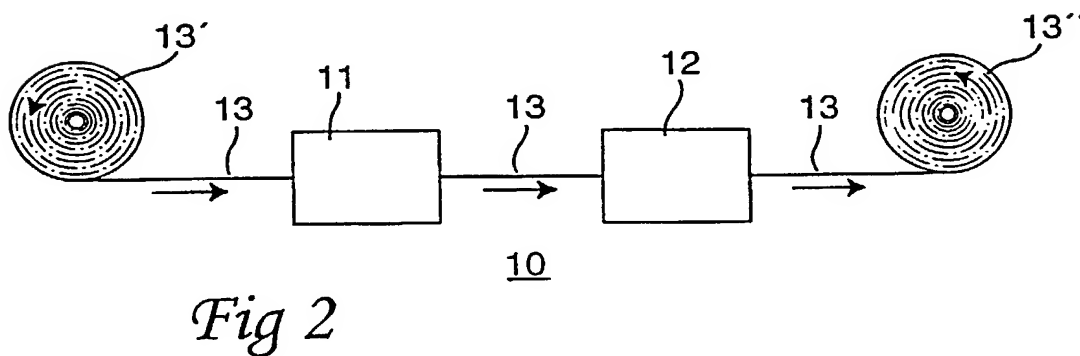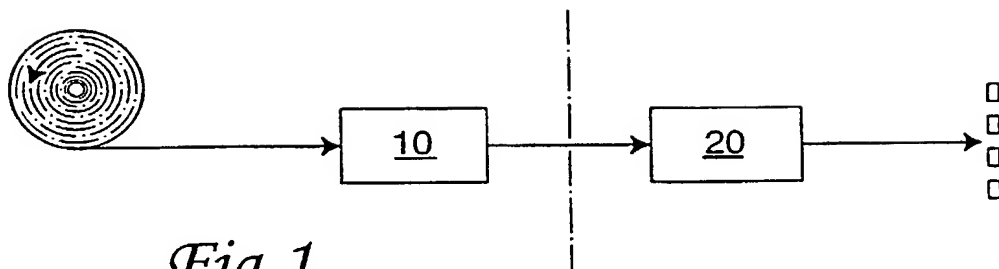

2/3

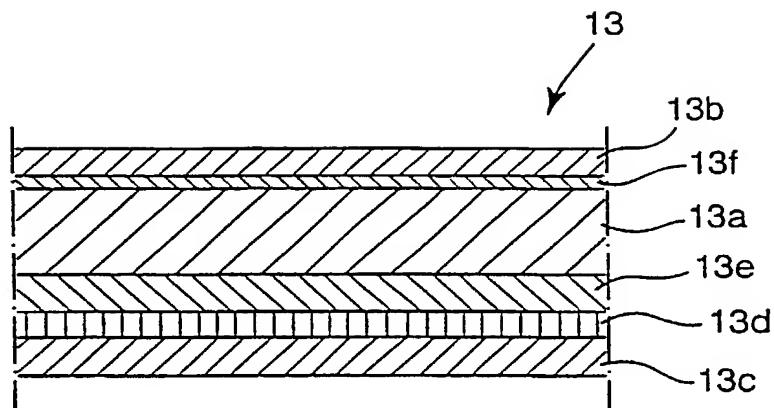


*Fig 4*

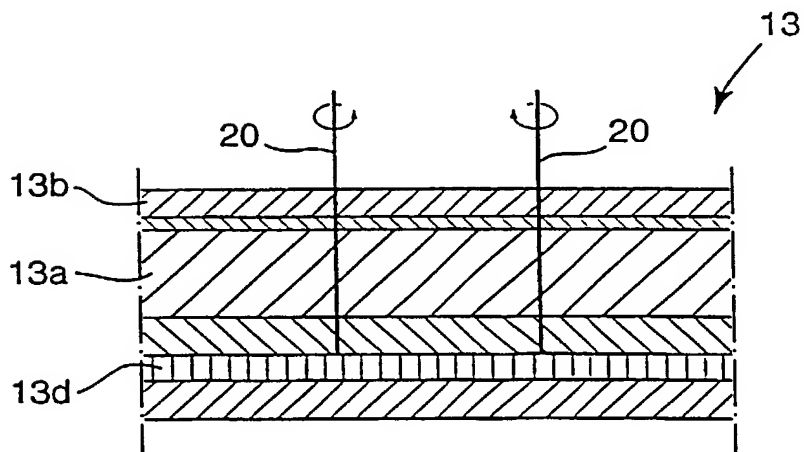


*Fig 5A*



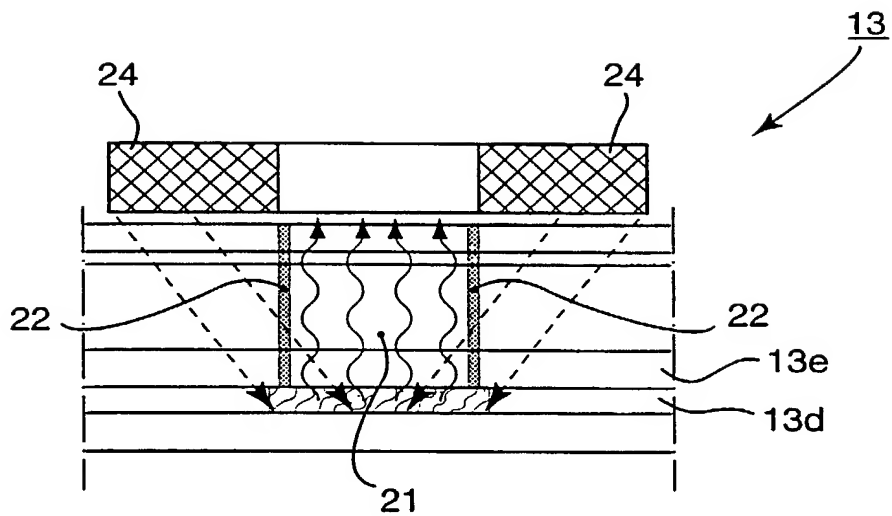

*Fig 5B*

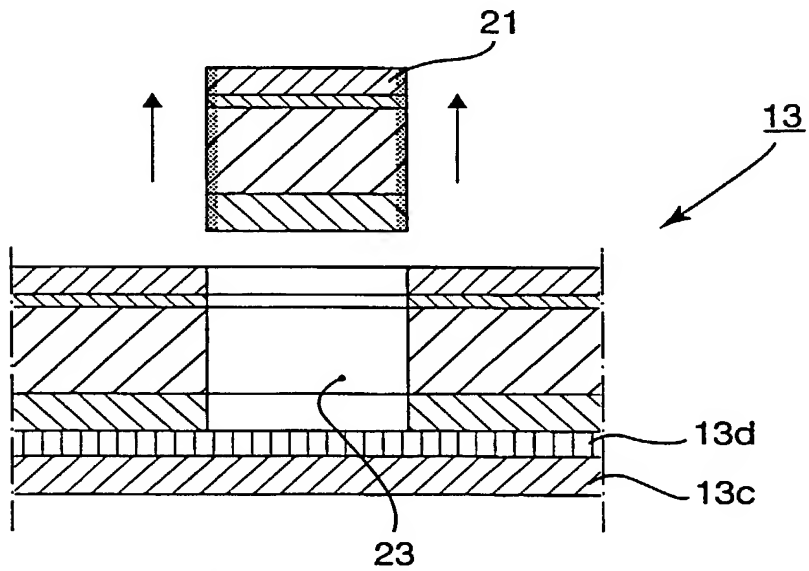

*Fig 5C*

Translation

3/prts

10/088680  
JC13 Rec'd PCT/PTO 21 MAR 2002

-1-

## A METHOD OF PRODUCING A PACKAGING CONTAINER PROVIDED WITH AN OPENING ARRANGEMENT

### TECHNICAL FIELD

The present invention relates to a method of producing packages provided with an opening arrangement and of the type which has an emptying hole prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard with a liquid-tight coating, of plastic, and the other side with a foil or coating of metal which serves as oxygen gas barrier and which, by means of a layer of sealing plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes in the thus coated paper or paperboard web and thereafter reforming the packaging blank provided with the hole into individual packages provided with an opening arrangement.

### BACKGROUND ART

Within the packaging industry, use is now often made of packages of single-use disposable type for the transport and handling of liquid foods, and a very large group of these so-called single-use disposable packages is produced from a packaging laminate which comprises a paper or paperboard layer and liquid-tight coatings of plastic on both sides of the paper or paperboard layer.

Examples of commercial packages of this type are TETRA BRIK® and TETRA REX®.

For foods which have a relatively rapid turnover in retail outlets and, as a result, relatively short shelf-life in their package, a packaging laminate solely of paper or paperboard and outer liquid-tight coatings of plastic is often sufficient to impart to the packed food the requisite product protection throughout its entire storage life from filling to consumption. On the other hand, for more perishable and storage-sensitive foods which are intended to be able to be stored for a relatively lengthy period of time in their packages, it is necessary that the packaging laminate be supplemented with at least one additional layer in order to make for extended shelf-life. In particular, it is necessary that the package be sufficiently tight in order, during the entire storage life of the packed food in its unopened package, to prevent the penetration of oxygen gas which could very rapidly cause deterioration in the food if it came into contact with the food.

In order to make for the packing of such perishable, storage- and oxygen gas-sensitive foods with extended shelf life, the packaging laminate is therefore normally supplemented with at least one additional layer of metal or plastic of other type than that employed in the outer plastic coatings of the packaging laminate. The most common packaging laminate for this purpose includes, as the above-mentioned additional layer, an aluminum foil which is practically entirely impermeable to oxygen gas and which, moreover, possesses the advantageous

An extremely well-known and well-functioning opening arrangement includes an emptying hole prepared in the paper or paperboard layer of the package wall and which is closed from inside and outside by respective surrounding layers in the package wall. In order to facilitate exposure of the emptying hole when the package is to be opened, the opening arrangement normally includes a separate opening strip fixedly secured on the outside of the package wall and whose removal entails that the subjacent part of the package wall is entrained and torn off along the incision edges of the hole so that the entire hole is exposed.

Other types of exteriorly applied opening arrangements for facilitating exposure of an emptying hole prepared in the package wall are also known in the art, but since they do not constitute a germane part of the present invention, they need not be described in greater detail here in order to understand the present invention.

A packaging blank for a packaging container of the type described by way of introduction is produced, according to a conventional method, from a rolled web of paper or paperboard. The rolled web is unwound from the reel and is led through a printing station where the web is provided with the desired decorative artwork and possibly other printing markings relevant for subsequent web operations. The printed web is thereafter led further to a mechanical processing station where the web, in a per se known manner, is given the desired pattern of crease lines and also provided with through-going holes of the desired size and configuration which correspond with the emptying opening of the finished package. From the processing station, the web is thereafter led further to a coating station where the web is coated on both its sides with liquid-tight plastic coatings, and possibly additional layers necessary for the packaging purpose, e.g. an aluminum foil (Alifoil) in that case when the web is later to be used for the production of packages for, for instance, oxygen gas-sensitive products. Finally, from the coating station, the web is wound up on package magazine reels for storage or further transport to a packing machine where the web is supplemented

with separate opening details in the areas of the prepared emptying hole, and is thereafter formed, filled and sealed to form individual consumer packages provided with an opening arrangement.

Packages produced according to this conventional method generally function well in those cases when the packaging laminate merely consists of paper or paperboard and outer coatings of plastic, while corresponding packages in which the packaging laminate also includes an aluminum foil show a tendency to lose tightness properties against oxygen gas or right from the outset display deteriorating tightness properties against oxygen gas, in particular within the area of the emptying hole prepared in the package wall. While the packages in most cases maintain sufficient oxygen gas tightness to impart to the packed product satisfactory protection during at least a major part of the storage life of the product in the unopened package, it is naturally a need in the art to be able to produce packages which right from the outset display a high level of oxygen gas tightness which, moreover, is maintained during the remaining part of the storage life of the product in its package.

According to another conventional method, packaging containers provided with an opening arrangement are produced from a similar packaging blank to that described above, but which, unlike the previous packaging blank, is not provided with any through-going emptying hole before the coating with the additional layer of plastic and aluminum. In this case, the emptying-preparatory holes are made on

the ready-coated packaging blank by means of punching tools in connection with the packing and filling machine, whereafter the thus provided holes are closed with the aid of an applicator which applies a sealing plastic patch or strip over the hole before the packaging blank is led in and reformed into packages in the packing and filling machine.

Packages produced according to this conventional method function well also in that case when the packaging laminate includes an aluminum foil, and such packages are moreover conveniently openable, but one serious drawback is that the method requires extremely accurate register maintenance and therefore complicated technical equipment in order to place the emptying holes in the correct position in relation to the printed artwork and crease line pattern of the packaging blank and in order to apply the sealing plastic patch or plastic strip in such a manner that it impenetrably but tightly seals the hole provided in the package wall.

#### OBJECTS OF THE INVENTION

One object of the present invention is therefore to provide an indication of how the above-described shortcomings and drawbacks inherent in the prior art technology may be obviated or at least considerably reduced.

A further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, of the type described by way of introduction which, unlike the prior art packaging

Yet a further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, with increased flexibility for an individual manufacturer of packages.

### SOLUTION

These objects are attained according to the present invention by the method as defined in appended Claim 1.

One key difference between the method according to the present invention and the former method as described above is, thus, that the provision of the emptying hole in the method according to the present invention is to take place on the ready-produced packaging blank, and hence not only on the paper or paperboard web in connection with the production of the packaging blank, as in the prior art conventional method.

One key difference between the method according to the present invention and the second conventional method as described above is further that the emptying holes, in the method according to the present invention, are made only partly through the packaging blank, i.e. from the one side of the packaging blank through the outer plastic coating and the paper or paperboard layer down to, but



not through, the subjacent aluminum foil which, thus, together with the outer plastic coating on the other side of the packaging blank, remain unpenetrated or intact on the packaging blank.

As a result of this unique partial hole provision on the finished packaging blank, inter alia the advantage will be afforded that the unruptured or intact aluminum foil (which is nevertheless already present in the packaging blank) can effectively be utilized for oxygen gas-tight closure of the emptying hole which, granted, can but need not be closed separately with an extra plastic strip or plastic patch as in the prior art method.

The deteriorated oxygen gas-tightness in prior art packages provided with opening arrangements of the above-described type, in particular in the region of the emptying opening prepared in the package wall is because of the fact that it has been difficult, for process-related reasons, to achieve a strong internal bonding of the individual layers included in the packaging laminate, i.e. the aluminum foil and the plastic, within this region. When the paper or paperboard web with holes provided is coated with aluminum foil and plastic, and is, in connection with, or immediately after such coating led through the nip between a press roller and a counter-pressure roller in order, under pressure, to compress and bond the layers to one another, the necessary compression pressure against the web is attained only in those web areas which are not hole-punched, i.e. where the web is wholly

continuous, while but a lower (insufficient) pressure is attained in remaining areas of the web, i.e. in the regions of the punched holes.

On the other hand, in the method according to the present invention, where the paper or paperboard web lacks the provision of holes, the same requisite pressure can be attained transversely across the entire web and within all regions of the web.

The partial provision of the emptying-preparatory holes in the well-integrated packaging web according to the present invention may be put into effect mechanically with the aid of punching tools which, at selected points, punch or cut incision lines of the same size and configuration as the desired emptying opening down to a pre-set depth in the packaging web, e.g. down to the aluminum foil beneath the paper or paperboard layer, whereafter the web portions defined by the incision lines (so-called confetti) are removed from the web for the formation of partly provided emptying holes on the upper side of the packaging web.

According to the present invention, the partly provided emptying holes are preferably realized with the aid of laser equipment which directs a cutting laser beam along a line corresponding to the opening configuration of the emptying opening down to the desired depth in the packaging material, i.e. through the plastic coating, and the paper or paperboard layer down to the subjacent aluminum foil, from the one side of the packaging web. The advantage in laser cutting as compared with mechanical punching is that laser cutting is mechanically

-10-

contactless with the moving packaging web and therefore does not involve any moving mechanical components which are worn as a result of physical contact with the moving packaging web or with any other moving machine part. A further major advantage is that a laser beam is easy to direct and set to the desired cutting depth during ongoing processing, without the need to stop the packaging web or otherwise arrest operation.

The parts of the packaging web defined by the incision lines are thereafter removed in a conventional manner by means of vacuum which sucks or draws off these from the packaging web and leaves the partly through-going holes in the packaging web.

In order to facilitate this removal by suction or drawing of the confetti from the packaging web, heat is applied to the web simultaneously within the pertinent confetti regions, whereby the sealing plastic or adhesive between the paper or paperboard layer and the aluminum foil is melted and, as a result, the confetti may more easily release its grip on the subjacent aluminum foil.

Preferably, the packaging web is heated within the selected regions by induction heating which is an efficient and reliable heating method also at extremely high web speeds.

The partly through-going emptying holes in the packaging web can thereafter be sealed with separate opening strips which are fixedly sealed on the one side of the packaging web in a mechanically strong, but rupturable sealing

According to the present invention, it is further possible, possibly after a preceding impregnation of the exposed fibre incision edges within the regions of the provided emptying holes, to form, fill and seal packages from the hole-provided packaging web and thereafter apply separate, e.g. injection moulded arrangements above each respective emptying hole on each individual package in connection with the package's departing from the packing and filling machine. Such opening arrangements are known to persons skilled in the art and occur in a multiplicity of different variations and, therefore, need not be described in greater detail in this context.

Further advantageous details and characterizing features of the present invention will be apparent from the following detailed description with reference to the accompanying Drawings.

Fig. 1 is a block diagram which, in highly simplified form, shows the two main stations 10 and 20 involved for carrying the method according to the present invention into effect, as well as how these two main stations are interrelated with each other. In the illustrated block diagram in Fig. 1, reference numeral 10 generally refers to a first main station or conversion plant, where sheet- or web-shaped packaging blanks are produced in per se conventional manner and using per

-12-

se conventional means for further transport to a second main station 20 where the sheet- or web-shaped packaging blanks are, with the aid of packing and filling machines, finally reformed into finished consumer packages. The two main stations 10 and 20 may be in line with each other, but are, in practice, always located at geographically wholly separate sites from one another, as intimated by the broken division line between the two stations.

Fig. 2 is a block diagram of the first main station 10 for producing a rolled web-shaped packaging blank with the desired decorative artwork and desired pattern of crease lines facilitating folding. The first main station 10 in the illustrated generic example includes a first processing station 11 and a second processing or coating station 12 which together produce the web-shaped packaging blank from a magazine reel 13' of paper or paperboard shown furthest to the left in Fig. 2.

From the magazine reel 13', a paper or paperboard web 13 is unwound and is led into the first processing station 11 where the web is provided on its one side with the desired decorative artwork of printing ink, and also control- or process markings relevant to subsequent processing operations of the web, at the same time as the web 13 is also provided in a conventional manner with the desired pattern of crease lines which facilitate folding.

From the first processing station 11, the web 13 is led to the second processing station 12 where the web is coated on its one side with plastic,

Fig. 3 is a general block diagram of the second main station 20 which, in the illustrated embodiment, comprises a packing and filling machine 14 of the type which, from a sheet, or web-shaped packaging blank, both forms, fills and seals finished packages 15. The packing and filling machine 14 further displays, at its infeed end, an apparatus 16 for cutting through the packaging blank along a substantially closed line whose size, configuration and placing correspond to the contours and placing of an emptying opening prepared in the finished package. After, or in connection with the apparatus 16, the packing and filling machine moreover displays an apparatus 17 by means of which the parts (the confetti) of the packaging blank defined by the incision lines are removed for the formation of emptying holes which are partly through-going in the packaging blank.

-14-

In operation, the web-shaped packaging blank 13 is unwound from the magazine reel 13" placed at the infeed end of the packing and filling machine 14 and is led to the apparatus 16 where the packaging blank is provided with incisions in register with the pre-printed decorative artwork and the crease line pattern of the packaging blank along a substantially closed line which extends from the one side of the packaging blank through the one outer plastic coating and the paper or paperboard layer down to the subjacent aluminum foil. From the apparatus 16, the packaging blank 13 is led further the apparatus 17 where the parts of the packaging blank defined by the incision lines are removed for the formation of partly through-going emptying holes in the packaging blank, before this is led into the packing and filling machine 14 proper for the production of filled, sealed packages 15 with opening arrangements including emptying holes provided in the package wall.

The apparatus 16 for applying emptying-preparatory incision lines in the packaging blank may be a conventional punching tool which is configured and adjusted such that it cuts in incision lines to the desired depth in the passing packaging blank.

According to the present invention, the apparatus 16 is preferably a laser apparatus which directs a laser beam of such intensity and wave length at the packaging blank that the beam cuts through the outer plastic coating and the paper or paperboard web down to, but not through, the aluminum foil from the one side

of the packaging blank. A laser apparatus enjoys the major advantage over a mechanical punching tool that it reliably cuts down to the desired depth in the packaging blank and that, moreover, it can rapidly and readily be switched for cutting incision lines of optional size and configuration, without the process needing to be arrested for this switching operation.

The apparatus 17 for removing the parts of the packaging blank enclosed by the incision lines includes or is connected to a vacuum source with the aid of which the parts are sucked or drawn free from the packaging blank for the formation of emptying holes partly through-going in the packaging blank and which, from the other side of the packaging blank, are closed by the intact or unruptured aluminum foil.

A more reliable and efficient removal by suction or drawing of the confetti is attained according to the present invention if the packaging blank, in connection with the removal operation, is selectively heated within the relevant hole regions in such a manner that the sealing plastic or adhesive between the paper or paperboard layer and the aluminum foil wholly or at least partly melts and the bond between the paper or paperboard layer and the aluminum foil is thereby weakened.

Since the packaging blank 13 includes aluminum, the bond-breaking heating may be readily realized by induction heating of the aluminum foil with the aid of conventional induction heater elements which rapidly heat the packaging



blank to a temperature corresponding to or slightly exceeding the melting temperature of the relevant sealing plastic.

As was described previously, the packing and filling machine 14 may also include an applicator (not shown) in association with or immediately after the confetti-removing apparatus 17 in order to apply a separate opening strip or the like over the exposed end of the partly provided emptying hole. Alternatively, the packing and filling machine 14 may include an apparatus (not shown) for applying a water-repellent impregnation agent for covering and protecting the exposed fibre incision edges within the regions of the above-mentioned emptying holes.

Finally, the packing and filling machine 14 may also be equipped with or connected to an apparatus (not shown) placed at the discharge end of the packing and filling machine and with which separate opening arrangements may be applied on the finished packages over the (possibly covered) emptying holes prepared in the package wall.

Suitable opening arrangements for this purpose are previously known to persons skilled in the art and occur in a multiplicity of different forms and configurations. Each type of such opening arrangement capable of facilitating puncturing and/or removal of the arrangements sealing the hole, including the aluminum foil, may be employed in the present invention.

With reference to Figs. 4 and 5A-5C, one particularly preferred embodiment of the method according to the present invention will now be

described in connection with a packaging blank of a laminated packaging material with the structure which is schematically shown in Fig. 4. The same reference numerals as previously employed have been employed for the same or corresponding components in Figs. 4 and 5. However, in certain cases lower case letters have been added after the reference numeral in order to designate separate parts of the relevant components.

Fig. 4 thus schematically shows a cross section of a sheet- or web-shaped packaging blank of a laminated packaging material carrying the generic reference numeral 13. The packaging blank 13 includes, in this example, a paper or paperboard layer 13a and outer, liquid-tight coatings 13b and 13c on both sides of the paper or paperboard layer 13a. Between the paper or paperboard layer 13a and the one outer plastic coating 13c, the packaging blank has an aluminum foil 13d which serves as oxygen gas barrier and which is bonded to the paper or paperboard layer 13a by means of an interjacent layer 13e of sealing plastic or adhesive of known type. The paper or paperboard layer 13a further has decorative artwork 13f of printing ink which is covered by, but visible through, the outer plastic coating 13b on the other side of the packaging blank 13. While not being particularly shown in Fig. 4, the packaging blank 13 is moreover provided with the desired pattern of crease lines which facilitate folding, and also process-related control markings, so-called bar codes, in register with the printed decorative artwork.

A web-shaped packaging blank 13 with the structure illustrated in Fig. 4 is processed according to the preferred embodiment of the present invention in the manner which is schematically illustrated in Figs. 5A-5C for producing packages provided with opening arrangements of the type which has an emptying hole prepared in the package wall through which the packages are intended to be emptied of their contents.

The web-shaped packaging blank 13 is unwound from a magazine reel 13" placed at the packing and filling machine 14 (Fig. 3), and is led to a laser apparatus 16 which directs a laser beam 20 (Fig. 5A) of adjustable wavelength and intensity at the one side of the passing packaging laminate 13 in order to cut an incision along a line corresponding to the desired opening contour of the emptying hole in the package wall. By the correct setting of the wavelength and intensity of the laser beam 20, the laser beam 20 burns or cuts through the outer plastic coating 13b and the paper or paperboard layer 13a down to, but not through, the subjacent aluminum foil 13d. Such apparatuses equipped with adjustable laser beams are well-known to persons skilled in the art and are not likely to need any detailed description here.

The thus incised packaging blank 13 is thereafter led further to the confetti-removing apparatus 17 (Fig. 3) where those parts 21 of the packaging blank which are defined by the incision lines 22 are removed by suction or drawing off by means of vacuum (schematically illustrated by arrows in Fig. 5C) for the formation

of emptying holes 23 partly through-going in the packaging blank 13 and closed from beneath by the intact aluminum foil 13d of the packaging blank 13, including the outer plastic coating 13c.

In order to facilitate and make for a reliable removal of the parts 21 from the packaging blank 13 by suction or drawing, the packaging blank is heated immediately prior to or in connection with this suction or drawing operation, as illustrated in Fig. 5B, by selective induction heating by means of induction heater elements 24 which heat the aluminum foil 13d directly to a suitable temperature for melting or softening the layer 13e of sealing plastic or other suitable adhesive. As a result of this induction heating, moisture present in the packaging blank (moisture content of approx. 5-7%) is forced down towards the aluminum foil, where the moisture reverses and, by a so-called blistering phenomenon, assists in releasing the confetti fraction 21 from the packaging blank 13.

The combination of laser cutting and removal by suction or drawing during simultaneous heating of the packaging blank within selected areas in the method according to the present invention enjoys the unique advantage that it may be applied on a running packaging web without requiring any complicated extra equipment for guiding the cutting laser beam in register with the pre-printed decorative artwork and the crease lines of the packaging blank. Moreover, it ensures an efficient and rapid processing of the packaging web at the same time as it has an inherent ability to be able to be adapted for accommodating varying types

It will thus be apparent from the foregoing description that the present invention satisfies the previously established objects and needs and makes for the production of packages provided with emptying arrangements in a simple, efficient manner using existent conventional equipment. While the present invention has been described in particular with reference to a packaging blank including an aluminum foil serving as a gas barrier, the present invention is naturally not restricted exclusively to such packaging blanks. Instead of an aluminum foil, the packaging blank could just as well include a coating of aluminum applied by vacuum deposition. To a person skilled in the art, it will further be obvious that other metals than aluminum may also be employed as gas barrier in the packaging blank, without departing from the inventive concept as this is defined in the appended Claims.

## WHAT IS CLAIMED IS:

1. A method of producing packages (15) provided with an opening arrangement and of the type which has an emptying hole (23) prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard (13a) with a liquid-tight coating (13b) of plastic, and the other side with a foil (13d) or coating of metal which serves as oxygen gas barrier and which, by means of a layer (13e) of scaling plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes (23) in the thus coated paper or paperboard web and thereafter reforming the packaging blank (13) provided with the holes into individual packages (15) provided with opening arrangements, characterized in that the emptying-preparatory holes (23) are made only partly through the coated paper or paperboard web (13) from one side of the web by first cutting or burning incisions (22) in the web along substantially closed lines in correspondence with the size, configuration and placing of each respective emptying hole (23) on the finished packages (15) through the outer plastic coating (13b) and paper or paperboard layer (13a) down to, but not through, the subjacent metal foil (13d) or metal coating, and thereafter removing the parts (21) of the packaging blank located inside the incision lines (22) for the formation of the emptying holes (23) which, from the other side of the web, are still closed by the unruptured or intact metal foil (13d) or coating.

2. The method as claimed in Claim 1, characterized in that the parts (21) of the packaging blank (13) located inside the incision lines (22) are sucked or drawn away from the packaging blank with the aid of a vacuum.

3. The method as claimed in Claim 1 or 2, characterized in that the packaging blank (13) is heated selectively within the regions of the parts (21) defined by the incision lines (22) immediately prior to and/or in connection with these parts being removed from the packaging blank (13).

4. The method as claimed in Claim 3, characterized in that the selective heating of the packaging blank (13) is realized by inductive heating of the metal foil (13d) or coating in the packaging blank.

5. The method as claimed in Claim 3 or 4, characterized in that the packaging blank (13) is heated to a temperature at which the layer (13e) of sealing plastic or other adhesive wholly or at least partly melts.

6. The method as claimed in any of the preceding Claims, characterized in that the packaging blank (13) is cut by means of laser (20) of adapted wavelength and intensity in order to cut down to, but not through, the metal foil (13d) or metal coating of the packaging blank.

-23-

7. The method as claimed in any of the preceding Claims, characterized in that the packaging blank (13) is provided with separate pull-off opening strips above the partly provided emptying holes (23), before the packaging blank (13) is reformed into packages (15).

8. The method as claimed in any of Claims 1 to 6, characterized in that the produced packages (15) are provided with separate opening arrangements on the outside of the packages in the region of the prepared emptying holes (23).

9. A package (15) provided with an opening arrangement and of the type which has an emptying hole (23) prepared in the package wall, through which the package is intended to be emptied of its contents, characterized in that the package is produced from a packaging material comprising a layer (13a) of paper or paperboard which, on the outside of the package, has a liquid-tight coating (13b) of plastic and, on the inside of the package, has a metal foil (13d) or coating serving as oxygen gas barrier, and that the emptying hole (23) prepared in the package wall is closed from the inside by the unruptured or intact metal foil (13d) or coating in the packaging material.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number  
**WO 01/21390 A1**




- (51) International Patent Classification<sup>7</sup>: B31B 1/74, B65D 5/72
- (21) International Application Number: PCT/SE00/01833
- (22) International Filing Date:  
21 September 2000 (21.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9903415-9 22 September 1999 (22.09.1999) SE
- (71) Applicant (for all designated States except US): TETRA LAVAL HOLDINGS & FINANCE S.A. [CH/CH]; Av. Général-Guisan 70, CH-1009 Pully (CH).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LASSON, Rolf [SE/SE]; Rudeboksvägen 307, S-226 55 Lund (SE).
- (74) Agent: SUNDELL, Håkan; AB Tetra Pak, Patent Department, Ruben Rausing's gata, S-221 86 Lund (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD OF PRODUCING A PACKAGING CONTAINER PROVIDED WITH AN OPENING ARRANGEMENT

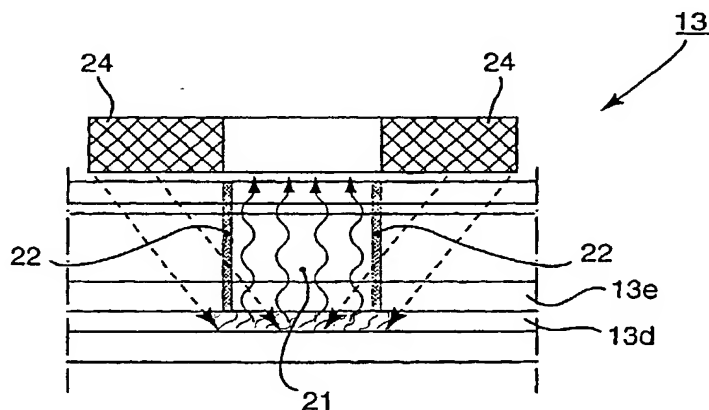

(57) Abstract: The disclosure relates to a method of producing packages with opening arrangements and of the type which has a hole prepared in the package wall through which the package is intended to be emptied of its contents. A web of paper or paperboard is coated on its one side with a liquid-tight coating of plastic and, on its other side, with a metal foil which serves as oxygen gas barrier and which is bonded to the paper or paperboard layer by an interjacent adhesive layer. The coated web or packaging blank is thereafter transported further to a packing and filling machine where the web is provided with emptying-preparatory holes before being reformed into finished packages in a conventional manner. The emptying-preparatory holes are made only partly through the web in that the web is first incised or cut along closed lines through the outer plastic coating and the paper or paperboard web down to, but not through, the subjacent metal layer, and the parts of the web enclosed by the incision lines being thereafter removed from the web with the aid of a vacuum. The removal of the above-mentioned web parts is facilitated in that the packaging blank is selectively heated in order wholly or at least partly to break the bond between the metal foil and the paper or paperboard layer within the region of these parts.

WO 01/21390 A1

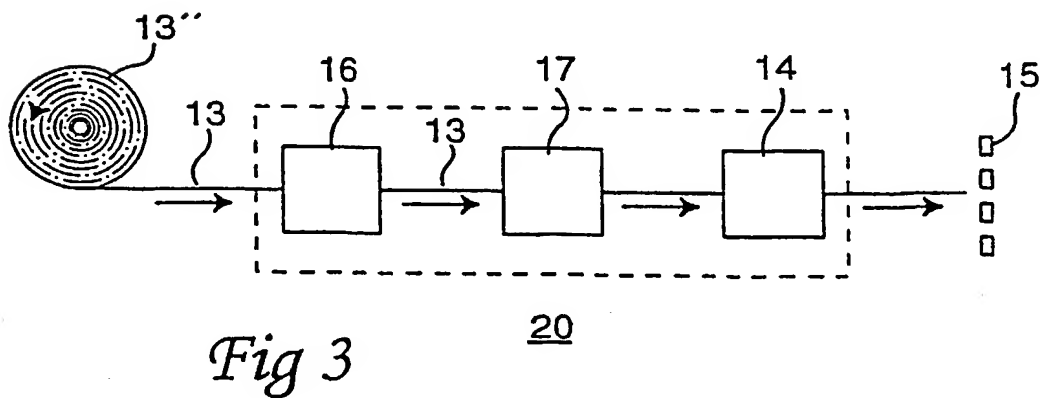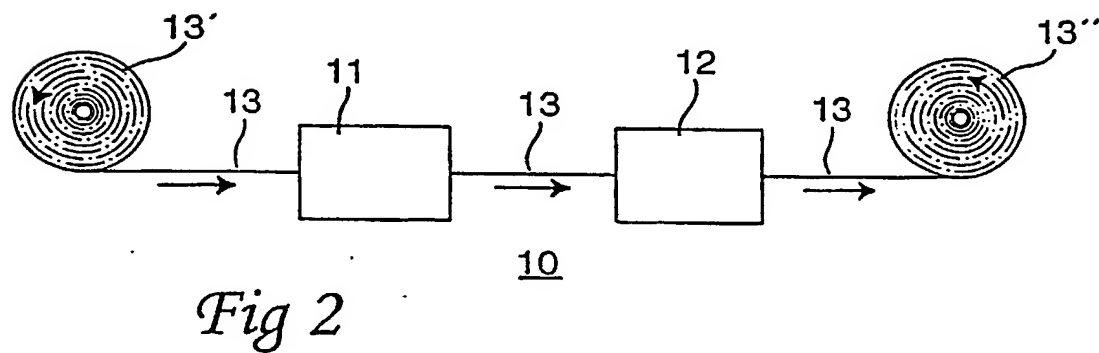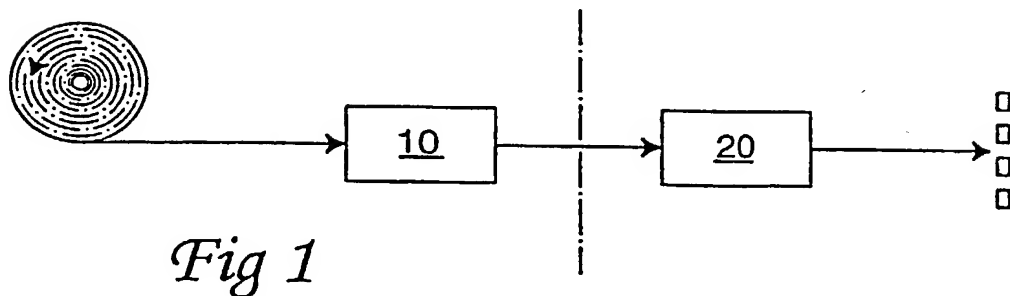

APPLN. FILING DATE: MARCH 21, 2002

TITLE: A METHOD OF PRODUCING A PACKAGING  
CONTAINER PROVIDED WITH AN OPENING ARRANGEMENT

INVENTOR(S): ROLF LASSON

APPLICATION SERIAL NO: 027650-976

SHEET 2 of 3

10/088680 10/088680

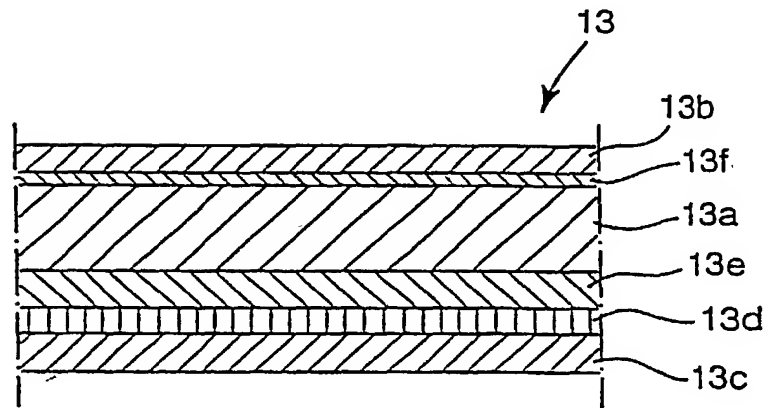


Fig 4

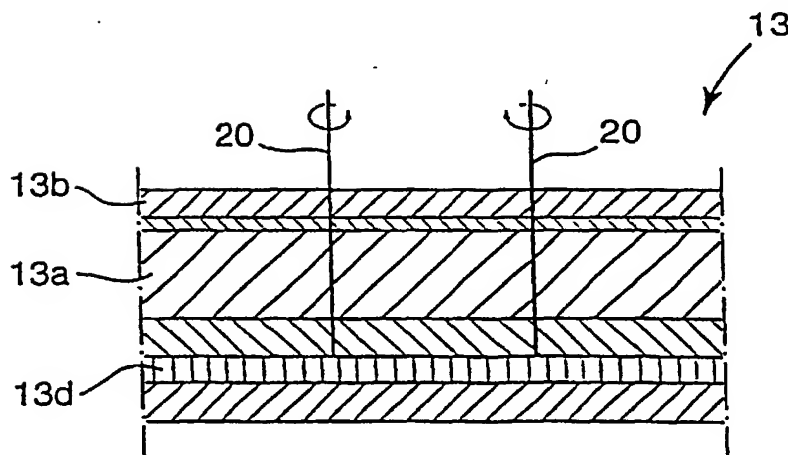


Fig 5A

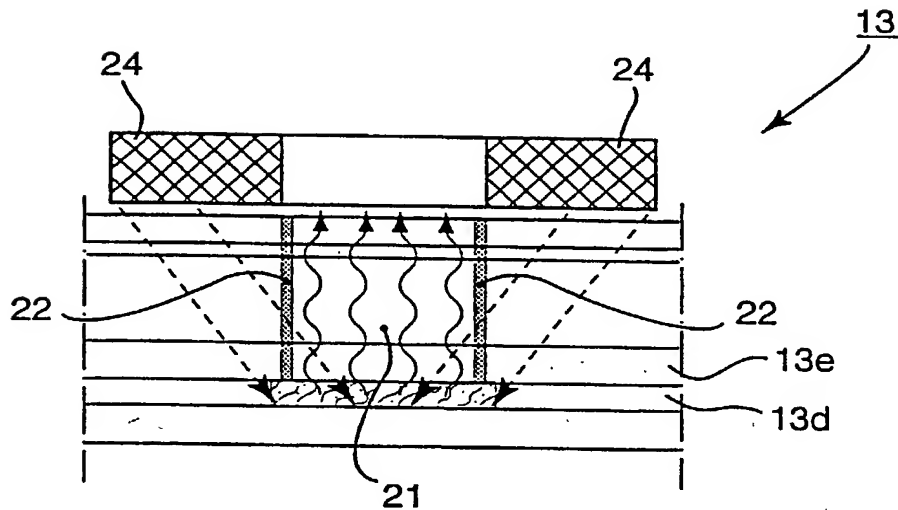


Fig 5B

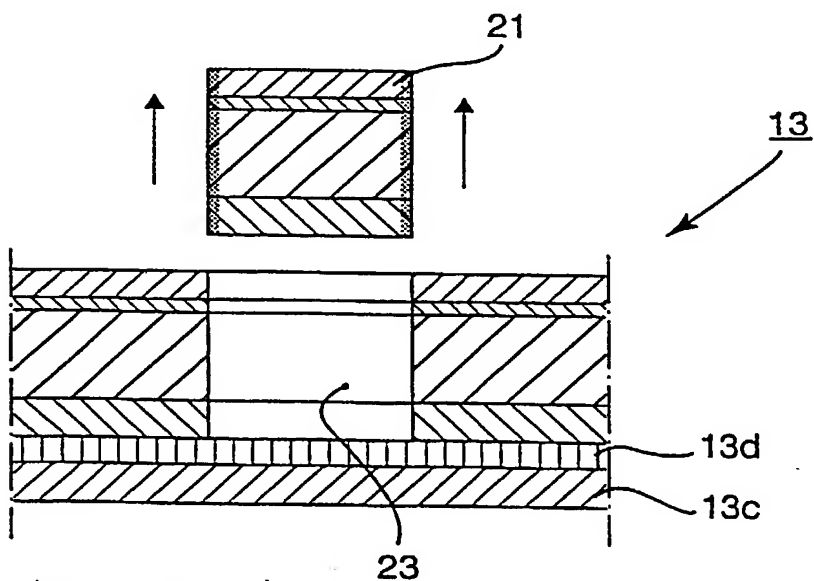


Fig 5C

sub spec.

100333630 104-038680  
JC13 Rec'd PCT/PTO 21 MAR 2002

-1-

### **Field of the Invention**

[0001] The present invention relates to a method of producing packages provided with an opening arrangement and of the type which has an emptying hole prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard with a liquid-tight coating, of plastic, and the other side with a foil or coating of metal which serves as oxygen gas barrier and which, by means of a layer of sealing plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes in the thus coated paper or paperboard web and thereafter reforming the packaging blank provided with the hole into individual packages provided with an opening arrangement.

### **Background of the Invention**

[0002] Within the packaging industry, use is now often made of packages of single-use disposable type for the transport and handling of liquid foods, and a very large group of these so-called single-use disposable packages is produced from a packaging laminate which comprises a paper or paperboard layer and liquid-tight coatings of plastic on both sides of the paper or paperboard layer. Examples of commercial packages of this type are TETRA BRIK® and TETRA REX®.

-2-

[0003] For foods which have a relatively rapid turnover in retail outlets and, as a result, relatively short shelf-life in their package, a packaging laminate solely of paper or paperboard and outer liquid-tight coatings of plastic is often sufficient to impart to the packed food the requisite product protection throughout its entire storage life from filling to consumption. On the other hand, for more perishable and storage-sensitive foods which are intended to be able to be stored for a relatively lengthy period of time in their packages, it is necessary that the packaging laminate be supplemented with at least one additional layer in order to make for extended shelf-life. In particular, it is necessary that the package be sufficiently tight in order, during the entire storage life of the packed food in its unopened package, to prevent the penetration of oxygen gas which could very rapidly cause deterioration in the food if it came into contact with the food.

[0004] In order to make for the packing of such perishable, storage- and oxygen gas-sensitive foods with extended shelf life, the packaging laminate is therefore normally supplemented with at least one additional layer of metal or plastic of other type than that employed in the outer plastic coatings of the packaging laminate. The most common packaging laminate for this purpose includes, as the above-mentioned additional layer, an aluminum foil which is practically entirely impermeable to oxygen gas and which, moreover, possesses the advantageous property that it makes possible inductive thermosealing which is a simple, but efficient method of rapidly obtaining mechanically strong and tight sealing joints

or seams when the sheet- or web-shaped packaging blank is reformed during the package production operation.

[0005] In addition to the requisite mechanical and physical properties so as to make for lengthy storage of foods with good shelf life, it is also desirable from the point of view of the consumer that the package can be easy to open when it is time to empty the package of its contents. In order to satisfy this need and provide a conveniently openable package, the package is therefore provided with some type of arrangement which facilitates opening and which may either be integral in or be a separate part of the package.

[0006] An extremely well-known and well-functioning opening arrangement includes an emptying hole prepared in the paper or paperboard layer of the package wall and which is closed from inside and outside by respective surrounding layers in the package wall. In order to facilitate exposure of the emptying hole when the package is to be opened, the opening arrangement normally includes a separate opening strip fixedly secured on the outside of the package wall and whose removal entails that the subjacent part of the package wall is entrained and torn off along the incision edges of the hole so that the entire hole is exposed.

[0007] Other types of exteriorly applied opening arrangements for facilitating exposure of an emptying hole prepared in the package wall are also known in the art, but since they do not constitute a germane part of the present invention, they

need not be described in greater detail here in order to understand the present invention.

[0008] A packaging blank for a packaging container of the type described by way of introduction is produced, according to a conventional method, from a rolled web of paper or paperboard. The rolled web is unwound from the reel and is led through a printing station where the web is provided with the desired decorative artwork and possibly other printing markings relevant for subsequent web operations. The printed web is thereafter led further to a mechanical processing station where the web, in a per se known manner, is given the desired pattern of crease lines and also provided with through-going holes of the desired size and configuration which correspond with the emptying opening of the finished package. From the processing station, the web is thereafter led further to a coating station where the web is coated on both its sides with liquid-tight plastic coatings, and possibly additional layers necessary for the packaging purpose, e.g. an aluminum foil (Alifoil) in that case when the web is later to be used for the production of packages for, for instance, oxygen gas-sensitive products. Finally, from the coating station, the web is wound up on package magazine reels for storage or further transport to a packing machine where the web is supplemented with separate opening details in the areas of the prepared emptying hole, and is thereafter formed, filled and sealed to form individual consumer packages provided with an opening arrangement.



[0009] Packages produced according to this conventional method generally function well in those cases when the packaging laminate merely consists of paper or paperboard and outer coatings of plastic, while corresponding packages in which the packaging laminate also includes an aluminum foil show a tendency to lose tightness properties against oxygen gas or right from the outset display deteriorating tightness properties against oxygen gas, in particular within the area of the emptying hole prepared in the package wall. While the packages in most cases maintain sufficient oxygen gas tightness to impart to the packed product satisfactory protection during at least a major part of the storage life of the product in the unopened package, it is naturally a need in the art to be able to produce packages which right from the outset display a high level of oxygen gas tightness which, moreover, is maintained during the remaining part of the storage life of the product in its package.

[0010] According to another conventional method, packaging containers provided with an opening arrangement are produced from a similar packaging blank to that described above, but which, unlike the previous packaging blank, is not provided with any through-going emptying hole before the coating with the additional layer of plastic and aluminum. In this case, the emptying-preparatory holes are made on the ready-coated packaging blank by means of punching tools in connection with the packing and filling machine, whereafter the thus provided holes are closed with the aid of an applicator which applies a sealing plastic patch

[0011] Packages produced according to this conventional method function well also in that case when the packaging laminate includes an aluminum foil, and such packages are moreover conveniently openable, but one serious drawback is that the method requires extremely accurate register maintenance and therefore complicated technical equipment in order to place the emptying holes in the correct position in relation to the printed artwork and crease line pattern of the packaging blank and in order to apply the sealing plastic patch or plastic strip in such a manner that it impenetrably but tightly seals the hole provided in the package wall.

**[0012]** One object of the present invention is therefore to provide an indication of how the above-described shortcomings and drawbacks inherent in the prior art technology may be obviated or at least considerably reduced.

[0013] A further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, of the type described by way of introduction which, unlike the prior art packaging containers, right from the outset display an oxygen gas tightness which is sufficiently high and stable so as to make possible long-term storage of a perishable, storage- and oxygen gas-sensitive product with good shelf life.

[0014] Yet a further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, with increased flexibility for an individual manufacturer of packages.

[0015] These objects are attained according to the present invention by the method as defined in appended Claim 1.

[0016] One key difference between the method according to the present invention and the former method as described above is, thus, that the provision of the emptying hole in the method according to the present invention is to take place on the ready-produced packaging blank, and hence not only on the paper or paperboard web in connection with the production of the packaging blank, as in the prior art conventional method.

[0017] One key difference between the method according to the present invention and the second conventional method as described above is further that the emptying holes, in the method according to the present invention, are made only partly through the packaging blank, i.e. from the one side of the packaging blank through the outer plastic coating and the paper or paperboard layer down to, but not through, the subjacent aluminum foil which, thus, together with the outer plastic coating on the other side of the packaging blank, remain unpenetrated or intact on the packaging blank.

[0018] As a result of this unique partial hole provision on the finished packaging blank, inter alia the advantage will be afforded that the unruptured or intact

[0020] On the other hand, in the method according to the present invention, where the paper or paperboard web lacks the provision of holes, the same requisite pressure can be attained transversely across the entire web and within all regions of the web.

[0021] The partial provision of the emptying-preparatory holes in the well-integrated packaging web according to the present invention may be put into effect mechanically with the aid of punching tools which, at selected points, punch or cut incision lines of the same size and configuration as the desired emptying opening down to a pre-set depth in the packaging web, e.g. down to the aluminum foil beneath the paper or paperboard layer, whereafter the web portions defined by the incision lines (so-called confetti) are removed from the web for the formation of partly provided emptying holes on the upper side of the packaging web.

**[0022]** According to the present invention, the partly provided emptying holes are preferably realized with the aid of laser equipment which directs a cutting laser beam along a line corresponding to the opening configuration of the emptying opening down to the desired depth in the packaging material, i.e. through the plastic coating, and the paper or paperboard layer down to the subjacent aluminum foil, from the one side of the packaging web. The advantage in laser cutting as compared with mechanical punching is that laser cutting is mechanically contactless with the moving packaging web and therefore does not involve any moving mechanical components which are worn as a result of physical contact with the moving packaging web or with any other moving machine part. A further major advantage is that a laser beam is easy to direct and set to the desired cutting depth during ongoing processing, without the need to stop the packaging web or otherwise arrest operation.

-10-

[0023] The parts of the packaging web defined by the incision lines are thereafter removed in a conventional manner by means of vacuum which sucks or draws off these from the packaging web and leaves the partly through-going holes in the packaging web.

[0024] In order to facilitate this removal by suction or drawing of the confetti from the packaging web, heat is applied to the web simultaneously within the pertinent confetti regions, whereby the sealing plastic or adhesive between the paper or paperboard layer and the aluminum foil is melted and, as a result, the confetti may more easily release its grip on the subjacent aluminum foil.

[0025] Preferably, the packaging web is heated within the selected regions by induction heating which is an efficient and reliable heating method also at extremely high web speeds.

[0026] The partly through-going emptying holes in the packaging web can thereafter be sealed with separate opening strips which are fixedly sealed on the one side of the packaging web in a mechanically strong, but rupturable sealing joint around the entire opening contour of the hole. Alternatively, or in addition, the exposed fibre incision edges may be impregnated or covered with a water-repellent coating prior to the application of the opening strips.

[0027] According to the present invention, it is further possible, possibly after a preceding impregnation of the exposed fibre incision edges within the regions of the provided emptying holes, to form, fill and seal packages from the hole-

provided packaging web and thereafter apply separate, e.g. injection moulded arrangements above each respective emptying hole on each individual package in connection with the package's departing from the packing and filling machine. Such opening arrangements are known to persons skilled in the art and occur in a multiplicity of different variations and, therefore, need not be described in greater detail in this context.

#### **Description of the Drawings and of the Invention**

[0028] Further advantageous details and characterizing features of the present invention will be apparent from the following detailed description with reference to the accompanying Drawings.

[0029] Fig. 1 is a block diagram which, in highly simplified form, shows the two main stations 10 and 20 involved for carrying the method according to the present invention into effect, as well as how these two main stations are interrelated with each other. In the illustrated block diagram in Fig. 1, reference numeral 10 generally refers to a first main station or conversion plant, where sheet- or web-shaped packaging blanks are produced in per se conventional manner and using per se conventional means for further transport to a second main station 20 where the sheet- or web-shaped packaging blanks are, with the aid of packing and filling machines, finally reformed into finished consumer packages. The two main stations 10 and 20 may be in line with each other, but are, in practice, always

located at geographically wholly separate sites from one another, as intimated by the broken division line between the two stations.

[0030] Fig. 2 is a block diagram of the first main station 10 for producing a rolled web-shaped packaging blank with the desired decorative artwork and desired pattern of crease lines facilitating folding. The first main station 10 in the illustrated generic example includes a first processing station 11 and a second processing or coating station 12 which together produce the web-shaped packaging blank from a magazine reel 13' of paper or paperboard shown furthest to the left in Fig. 2.

[0031] From the magazine reel 13', a paper or paperboard web 13 is unwound and is led into the first processing station 11 where the web is provided on its one side with the desired decorative artwork of printing ink, and also control- or process markings relevant to subsequent processing operations of the web, at the same time as the web 13 is also provided in a conventional manner with the desired pattern of crease lines which facilitate folding.

[0032] From the first processing station 11, the web 13 is led to the second processing station 12 where the web is coated on its one side with plastic, preferably polyethylene, and on its other side with an aluminum foil which serves as gas barrier and which is bonded to the paper or paperboard layer of the web by a layer of sealing plastic or other suitable adhesive applied between the paper or paperboard layer and the aluminum foil. At the same time, the web is coated with



-13-

at least one additional layer of plastic in order to cover the exposed aluminum foil and produce a web-shaped, oxygen gas- and liquid-tight packaging blank 13 which is thereafter wound up on a finished packaging magazine reel 13".

[0033] From the main station 10, possibly after intermediate storage, the finished packaging magazine reel 13" is thereafter transported to the second main station 20 for the production of packages provided with easily opened opening arrangements.

[0034] Fig. 3 is a general block diagram of the second main station 20 which, in the illustrated embodiment, comprises a packing and filling machine 14 of the type which, from a sheet, or web-shaped packaging blank, both forms, fills and seals finished packages 15. The packing and filling machine 14 further displays, at its infeed end, an apparatus 16 for cutting through the packaging blank along a substantially closed line whose size, configuration and placing correspond to the contours and placing of an emptying opening prepared in the finished package. After, or in connection with the apparatus 16, the packing and filling machine moreover displays an apparatus 17 by means of which the parts (the confetti) of the packaging blank defined by the incision lines are removed for the formation of emptying holes which are partly through-going in the packaging blank.

[0035] In operation, the web-shaped packaging blank 13 is unwound from the magazine reel 13" placed at the infeed end of the packing and filling machine 14 and is led to the apparatus 16 where the packaging blank is provided with incisions

in register with the pre-printed decorative artwork and the crease line pattern of the packaging blank along a substantially closed line which extends from the one side of the packaging blank through the one outer plastic coating and the paper or paperboard layer down to the subjacent aluminum foil. From the apparatus 16, the packaging blank 13 is led further the apparatus 17 where the parts of the packaging blank defined by the incision lines are removed for the formation of partly through-going emptying holes in the packaging blank, before this is led into the packing and filling machine 14 proper for the production of filled, sealed packages 15 with opening arrangements including emptying holes provided in the package wall.

**[0036]** The apparatus 16 for applying emptying-preparatory incision lines in the packaging blank may be a conventional punching tool which is configured and adjusted such that it cuts in incision lines to the desired depth in the passing packaging blank.

**[0037]** According to the present invention, the apparatus 16 is preferably a laser apparatus which directs a laser beam of such intensity and wave length at the packaging blank that the beam cuts through the outer plastic coating and the paper or paperboard web down to, but not through, the aluminum foil from the one side of the packaging blank. A laser apparatus enjoys the major advantage over a mechanical punching tool that it reliably cuts down to the desired depth in the packaging blank and that, moreover, it can rapidly and readily be switched for

-15-

cutting incision lines of optional size and configuration, without the process needing to be arrested for this switching operation.

[0038] The apparatus 17 for removing the parts of the packaging blank enclosed by the incision lines includes or is connected to a vacuum source with the aid of which the parts are sucked or drawn free from the packaging blank for the formation of emptying holes partly through-going in the packaging blank and which, from the other side of the packaging blank, are closed by the intact or unruptured aluminum foil.

[0039] A more reliable and efficient removal by suction or drawing of the confetti is attained according to the present invention if the packaging blank, in connection with the removal operation, is selectively heated within the relevant hole regions in such a manner that the sealing plastic or adhesive between the paper or paperboard layer and the aluminum foil wholly or at least partly melts and the bond between the paper or paperboard layer and the aluminum foil is thereby weakened.

[0040] Since the packaging blank 13 includes aluminum, the bond-breaking heating may be readily realized by induction heating of the aluminum foil with the aid of conventional induction heater elements which rapidly heat the packaging blank to a temperature corresponding to or slightly exceeding the melting temperature of the relevant sealing plastic.

**[0041]** As was described previously, the packing and filling machine 14 may also include an applicator (not shown) in association with or immediately after the confetti-removing apparatus 17 in order to apply a separate opening strip or the like over the exposed end of the partly provided emptying hole. Alternatively, the packing and filling machine 14 may include an apparatus (not shown) for applying a water-repellent impregnation agent for covering and protecting the exposed fibre incision edges within the regions of the above-mentioned emptying holes.

**[0042]** Finally, the packing and filling machine 14 may also be equipped with or connected to an apparatus (not shown) placed at the discharge end of the packing and filling machine and with which separate opening arrangements may be applied on the finished packages over the (possibly covered) emptying holes prepared in the package wall.

[0043] Suitable opening arrangements for this purpose are previously known to persons skilled in the art and occur in a multiplicity of different forms and configurations. Each type of such opening arrangement capable of facilitating puncturing and/or removal of the arrangements sealing the hole, including the aluminum foil, may be employed in the present invention.

[0044] With reference to Figs. 4 and 5A-5C, one particularly preferred embodiment of the method according to the present invention will now be described in connection with a packaging blank of a laminated packaging material with the structure which is schematically shown in Fig. 4. The same reference

numerals as previously employed have been employed for the same or corresponding components in Figs. 4 and 5. However, in certain cases lower case letters have been added after the reference numeral in order to designate separate parts of the relevant components.

[0045] Fig. 4 thus schematically shows a cross section of a sheet- or web-shaped packaging blank of a laminated packaging material carrying the generic reference numeral 13. The packaging blank 13 includes, in this example, a paper or paperboard layer 13a and outer, liquid-tight coatings 13b and 13c on both sides of the paper or paperboard layer 13a. Between the paper or paperboard layer 13a and the one outer plastic coating 13c, the packaging blank has an aluminum foil 13d which serves as oxygen gas barrier and which is bonded to the paper or paperboard layer 13a by means of an interjacent layer 13e of sealing plastic or adhesive of known type. The paper or paperboard layer 13a further has decorative artwork 13f of printing ink which is covered by, but visible through, the outer plastic coating 13b on the other side of the packaging blank 13. While not being particularly shown in Fig. 4, the packaging blank 13 is moreover provided with the desired pattern of crease lines which facilitate folding, and also process-related control markings, so-called bar codes, in register with the printed decorative artwork.

[0046] A web-shaped packaging blank 13 with the structure illustrated in Fig. 4 is processed according to the preferred embodiment of the present invention in the

[0048] The thus incised packaging blank 13 is thereafter led further to the confetti-removing apparatus 17 (Fig. 3) where those parts 21 of the packaging blank which are defined by the incision lines 22 are removed by suction or drawing off by means of vacuum (schematically illustrated by arrows in Fig. 5C) for the formation of emptying holes 23 partly through-going in the packaging blank

13 and closed from beneath by the intact aluminum foil 13d of the packaging blank 13, including the outer plastic coating 13c.

[0049] In order to facilitate and make for a reliable removal of the parts 21 from the packaging blank 13 by suction or drawing, the packaging blank is heated immediately prior to or in connection with this suction or drawing operation, as illustrated in Fig. 5B, by selective induction heating by means of induction heater elements 24 which heat the aluminum foil 13d directly to a suitable temperature for melting or softening the layer 13e of sealing plastic or other suitable adhesive. As a result of this induction heating, moisture present in the packaging blank (moisture content of approx. 5-7%) is forced down towards the aluminum foil, where the moisture reverses and, by a so-called blistering phenomenon, assists in releasing the confetti fraction 21 from the packaging blank 13.

[0050] The combination of laser cutting and removal by suction or drawing during simultaneous heating of the packaging blank within selected areas in the method according to the present invention enjoys the unique advantage that it may be applied on a running packaging web without requiring any complicated extra equipment for guiding the cutting laser beam in register with the pre-printed decorative artwork and the crease lines of the packaging blank. Moreover, it ensures an efficient and rapid processing of the packaging web at the same time as it has an inherent ability to be able to be adapted for accommodating varying types and configurations of emptying holes while in ongoing operation, without the

-20-

packaging web needing to be stopped or operation otherwise needing to be disrupted for such a switching operation.

[0051] It will thus be apparent from the foregoing description that the present invention satisfies the previously established objects and needs and makes for the production of packages provided with emptying arrangements in a simple, efficient manner using existent conventional equipment. While the present invention has been described in particular with reference to a packaging blank including an aluminum foil serving as a gas barrier, the present invention is naturally not restricted exclusively to such packaging blanks. Instead of an aluminum foil, the packaging blank could just as well include a coating of aluminum applied by vacuum deposition. To a person skilled in the art, it will further be obvious that other metals than aluminum may also be employed as gas barrier in the packaging blank, without departing from the inventive concept as this is defined in the appended Claims.



Spec without  
claims

10088680 10/088680  
JC13 Rec'd PCT/PTO 21 MAR 2002

-1-

~~{A METHOD OF PRODUCING A PACKAGING CONTAINER}~~ Field of the  
Invention]

~~{PROVIDED WITH AN OPENING ARRANGEMENT~~

~~TECHNICAL FIELD}~~

**[[0001]]** The present invention relates to a method of producing packages provided with an opening arrangement and of the type which has an emptying hole prepared in the package wall and through which the package is intended to be emptied of its contents, the method comprising the steps of coating one side of a web of paper or paperboard with a liquid-tight coating, of plastic, and the other side with a foil or coating of metal which serves as oxygen gas barrier and which, by means of a layer of sealing plastic or other suitable adhesive, is bonded to the paper or paperboard web; of making emptying-preparatory holes in the thus coated paper or paperboard web and thereafter reforming the packaging blank provided with the hole into individual packages provided with an opening arrangement.

~~{BACKGROUND ART}~~

**[Background of the Invention**

**[0002]]** Within the packaging industry, use is now often made of packages of single-use disposable type for the transport and handling of liquid foods, and a



laminate. The most common packaging laminate for this purpose includes, as the above-mentioned additional layer, an aluminum foil which is practically entirely impermeable to oxygen gas and which, moreover, possesses the advantageous property that it makes possible inductive thermosealing which is a simple, but efficient method of rapidly obtaining mechanically strong and tight sealing joints or seams when the sheet- or web-shaped packaging blank is reformed during the package production operation.

**[[0005]]** In addition to the requisite mechanical and physical properties so as to make for lengthy storage of foods with good shelf life, it is also desirable from the point of view of the consumer that the package can be easy to open when it is time to empty the package of its contents. In order to satisfy this need and provide a conveniently openable package, the package is therefore provided with some type of arrangement which facilitates opening and which may either be integral in or be a separate part of the package.

**[[0006]]** An extremely well-known and well-functioning opening arrangement includes an emptying hole prepared in the paper or paperboard layer of the package wall and which is closed from inside and outside by respective surrounding layers in the package wall. In order to facilitate exposure of the emptying hole when the package is to be opened, the opening arrangement normally includes a separate opening strip fixedly secured on the outside of the package wall and whose removal entails that the subjacent part of the package wall

is entrained and torn off along the incision edges of the hole so that the entire hole is exposed.

**[[0007]]** Other types of exteriorly applied opening arrangements for facilitating exposure of an emptying hole prepared in the package wall are also known in the art, but since they do not constitute a germane part of the present invention, they need not be described in greater detail here in order to understand the present invention.

**[[0008]]** A packaging blank for a packaging container of the type described by way of introduction is produced, according to a conventional method, from a rolled web of paper or paperboard. The rolled web is unwound from the reel and is led through a printing station where the web is provided with the desired decorative artwork and possibly other printing markings relevant for subsequent web operations. The printed web is thereafter led further to a mechanical processing station where the web, in a per se known manner, is given the desired pattern of crease lines and also provided with through-going holes of the desired size and configuration which correspond with the emptying opening of the finished package. From the processing station, the web is thereafter led further to a coating station where the web is coated on both its sides with liquid-tight plastic coatings, and possibly additional layers necessary for the packaging purpose, e.g. an aluminum foil (Alifoil) in that case when the web is later to be used for the production of packages for, for instance, oxygen gas-sensitive products. Finally,

-5-

from the coating station, the web is wound up on package magazine reels for storage or further transport to a packing machine where the web is supplemented with separate opening details in the areas of the prepared emptying hole, and is thereafter formed, filled and sealed to form individual consumer packages provided with an opening arrangement.

**[[0009]]** Packages produced according to this conventional method generally function well in those cases when the packaging laminate merely consists of paper or paperboard and outer coatings of plastic, while corresponding packages in which the packaging laminate also includes an aluminum foil show a tendency to lose tightness properties against oxygen gas or right from the outset display deteriorating tightness properties against oxygen gas, in particular within the area of the emptying hole prepared in the package wall. While the packages in most cases maintain sufficient oxygen gas tightness to impart to the packed product satisfactory protection during at least a major part of the storage life of the product in the unopened package, it is naturally a need in the art to be able to produce packages which right from the outset display a high level of oxygen gas tightness which, moreover, is maintained during the remaining part of the storage life of the product in its package.

**[[0010]]** According to another conventional method, packaging containers provided with an opening arrangement are produced from a similar packaging blank to that described above, but which, unlike the previous packaging blank, is

[[0011]] Packages produced according to this conventional method function well also in that case when the packaging laminate includes an aluminum foil, and such packages are moreover conveniently openable, but one serious drawback is that the method requires extremely accurate register maintenance and therefore complicated technical equipment in order to place the emptying holes in the correct position in relation to the printed artwork and crease line pattern of the packaging blank and in order to apply the sealing plastic patch or plastic strip in such a manner that it impenetrably but tightly seals the hole provided in the package wall.

### [Summary of the Invention]

**[0012]** One object of the present invention is therefore to provide an indication of how the above-described shortcomings and drawbacks inherent in the prior art technology may be obviated or at least considerably reduced.

[[0013]] A further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, of the type described by way of introduction which, unlike the prior art packaging containers, right from the outset display an oxygen gas tightness which is sufficiently high and stable so as to make possible long-term storage of a perishable, storage- and oxygen gas-sensitive product with good shelf life.

[[0014]] Yet a further object of the present invention is to provide a method of producing packaging containers, provided with an opening arrangement, with increased flexibility for an individual manufacturer of packages.

~~{SOLUTION}~~

[[0015]] These objects are attained according to the present invention by the method as defined in appended Claim 1.

[[0016]] One key difference between the method according to the present invention and the former method as described above is, thus, that the provision of the emptying hole in the method according to the present invention is to take place on the ready-produced packaging blank, and hence not only on the paper or paperboard web in connection with the production of the packaging blank, as in the prior art conventional method.

[[0017]] One key difference between the method according to the present invention and the second conventional method as described above is further that the emptying holes, in the method according to the present invention, are made

[[0019]] The deteriorated oxygen gas-tightness in prior art packages provided with opening arrangements of the above-described type, in particular in the region of the emptying opening prepared in the package wall is because of the fact that it has been difficult, for process-related reasons, to achieve a strong internal bonding of the individual layers included in the packaging laminate, i.e. the aluminum foil and the plastic, within this region. When the paper or paperboard web with holes provided is coated with aluminum foil and plastic, and is, in connection with, or immediately after such coating led through the nip between a press roller and a counter-pressure roller in order, under pressure, to compress and bond the layers to one another, the necessary compression pressure against the web is attained only



in those web areas which are not hole-punched, i.e. where the web is wholly continuous, while but a lower (insufficient) pressure is attained in remaining areas of the web, i.e. in the regions of the punched holes.

[[0021]] The partial provision of the emptying-preparatory holes in the well-integrated packaging web according to the present invention may be put into effect mechanically with the aid of punching tools which, at selected points, punch or cut incision lines of the same size and configuration as the desired emptying opening down to a pre-set depth in the packaging web, e.g. down to the aluminum foil beneath the paper or paperboard layer, whereafter the web portions defined by the incision lines (so-called confetti) are removed from the web for the formation of partly provided emptying holes on the upper side of the packaging web.

-10-

compared with mechanical punching is that laser cutting is mechanically contactless with the moving packaging web and therefore does not involve any moving mechanical components which are worn as a result of physical contact with the moving packaging web or with any other moving machine part. A further major advantage is that a laser beam is easy to direct and set to the desired cutting depth during ongoing processing, without the need to stop the packaging web or otherwise arrest operation.

**[[0023]]** The parts of the packaging web defined by the incision lines are thereafter removed in a conventional manner by means of vacuum which sucks or draws off these from the packaging web and leaves the partly through-going holes in the packaging web.

**[[0024]]** In order to facilitate this removal by suction or drawing of the confetti from the packaging web, heat is applied to the web simultaneously within the pertinent confetti regions, whereby the sealing plastic or adhesive between the paper or paperboard layer and the aluminum foil is melted and, as a result, the confetti may more easily release its grip on the subjacent aluminum foil.

**[[0025]]** Preferably, the packaging web is heated within the selected regions by induction heating which is an efficient and reliable heating method also at extremely high web speeds.

**[[0026]]** The partly through-going emptying holes in the packaging web can thereafter be sealed with separate opening strips which are fixedly sealed on the

one side of the packaging web in a mechanically strong, but rupturable sealing joint around the entire opening contour of the hole. Alternatively, or in addition, the exposed fibre incision edges may be impregnated or covered with a water-repellent coating prior to the application of the opening strips.

**[[0027]]** According to the present invention, it is further possible, possibly after a preceding impregnation of the exposed fibre incision edges within the regions of the provided emptying holes, to form, fill and seal packages from the hole-provided packaging web and thereafter apply separate, e.g. injection moulded arrangements above each respective emptying hole on each individual package in connection with the package's departing from the packing and filling machine. Such opening arrangements are known to persons skilled in the art and occur in a multiplicity of different variations and, therefore, need not be described in greater detail in this context.

#### **Description of the Drawings and of the Invention**

**[[0028]]** Further advantageous details and characterizing features of the present invention will be apparent from the following detailed description with reference to the accompanying Drawings.

**[[0029]]** Fig. 1 is a block diagram which, in highly simplified form, shows the two main stations 10 and 20 involved for carrying the method according to the present invention into effect, as well as how these two main stations are

-12-

interrelated with each other. In the illustrated block diagram in Fig. 1, reference numeral 10 generally refers to a first main station or conversion plant, where sheet- or web-shaped packaging blanks are produced in per se conventional manner and using per se conventional means for further transport to a second main station 20 where the sheet- or web-shaped packaging blanks are, with the aid of packing and filling machines, finally reformed into finished consumer packages. The two main stations 10 and 20 may be in line with each other, but are, in practice, always located at geographically wholly separate sites from one another, as intimated by the broken division line between the two stations.

**[[0030]]** Fig. 2 is a block diagram of the first main station 10 for producing a rolled web-shaped packaging blank with the desired decorative artwork and desired pattern of crease lines facilitating folding. The first main station 10 in the illustrated generic example includes a first processing station 11 and a second processing or coating station 12 which together produce the web-shaped packaging blank from a magazine reel 13' of paper or paperboard shown furthest to the left in Fig. 2.

**[[0031]]** From the magazine reel 13', a paper or paperboard web 13 is unwound and is led into the first processing station 11 where the web is provided on its one side with the desired decorative artwork of printing ink, and also control- or process markings relevant to subsequent processing operations of the web, at the

same time as the web 13 is also provided in a conventional manner with the desired pattern of crease lines which facilitate folding.

**[[0032]]** From the first processing station 11, the web 13 is led to the second processing station 12 where the web is coated on its one side with plastic, preferably polyethylene, and on its other side with an aluminum foil which serves as gas barrier and which is bonded to the paper or paperboard layer of the web by a layer of sealing plastic or other suitable adhesive applied between the paper or paperboard layer and the aluminum foil. At the same time, the web is coated with at least one additional layer of plastic in order to cover the exposed aluminum foil and produce a web-shaped, oxygen gas- and liquid-tight packaging blank 13 which is thereafter wound up on a finished packaging magazine reel 13".

**[[0033]]** From the main station 10, possibly after intermediate storage, the finished packaging magazine reel 13" is thereafter transported to the second main station 20 for the production of packages provided with easily opened opening arrangements.

**[[0034]]** Fig. 3 is a general block diagram of the second main station 20 which, in the illustrated embodiment, comprises a packing and filling machine 14 of the type which, from a sheet, or web-shaped packaging blank, both forms, fills and seals finished packages 15. The packing and filling machine 14 further displays, at its infeed end, an apparatus 16 for cutting through the packaging blank along a substantially closed line whose size, configuration and placing correspond to the

-14-

contours and placing of an emptying opening prepared in the finished package.

After, or in connection with the apparatus 16, the packing and filling machine moreover displays an apparatus 17 by means of which the parts (the confetti) of the packaging blank defined by the incision lines are removed for the formation of emptying holes which are partly through-going in the packaging blank.

**[[0035]]** In operation, the web-shaped packaging blank 13 is unwound from the magazine reel 13" placed at the infeed end of the packing and filling machine 14 and is led to the apparatus 16 where the packaging blank is provided with incisions in register with the pre-printed decorative artwork and the crease line pattern of the packaging blank along a substantially closed line which extends from the one side of the packaging blank through the one outer plastic coating and the paper or paperboard layer down to the subjacent aluminum foil. From the apparatus 16, the packaging blank 13 is led further the apparatus 17 where the parts of the packaging blank defined by the incision lines are removed for the formation of partly through-going emptying holes in the packaging blank, before this is led into the packing and filling machine 14 proper for the production of filled, sealed packages 15 with opening arrangements including emptying holes provided in the package wall.

**[[0036]]** The apparatus 16 for applying emptying-preparatory incision lines in the packaging blank may be a conventional punching tool which is configured and

-15-

adjusted such that it cuts in incision lines to the desired depth in the passing packaging blank.

**[[0037]]** According to the present invention, the apparatus 16 is preferably a laser apparatus which directs a laser beam of such intensity and wave length at the packaging blank that the beam cuts through the outer plastic coating and the paper or paperboard web down to, but not through, the aluminum foil from the one side of the packaging blank. A laser apparatus enjoys the major advantage over a mechanical punching tool that it reliably cuts down to the desired depth in the packaging blank and that, moreover, it can rapidly and readily be switched for cutting incision lines of optional size and configuration, without the process needing to be arrested for this switching operation.

**[[0038]]** The apparatus 17 for removing the parts of the packaging blank enclosed by the incision lines includes or is connected to a vacuum source with the aid of which the parts are sucked or drawn free from the packaging blank for the formation of emptying holes partly through-going in the packaging blank and which, from the other side of the packaging blank, are closed by the intact or unruptured aluminum foil.

**[[0039]]** A more reliable and efficient removal by suction or drawing of the confetti is attained according to the present invention if the packaging blank, in connection with the removal operation, is selectively heated within the relevant hole regions in such a manner that the sealing plastic or adhesive between the

paper or paperboard layer and the aluminum foil wholly or at least partly melts and the bond between the paper or paperboard layer and the aluminum foil is thereby weakened.

**[[0040]]** Since the packaging blank 13 includes aluminum, the bond-breaking heating may be readily realized by induction heating of the aluminum foil with the aid of conventional induction heater elements which rapidly heat the packaging blank to a temperature corresponding to or slightly exceeding the melting temperature of the relevant sealing plastic.

**[[0041]]** As was described previously, the packing and filling machine 14 may also include an applicator (not shown) in association with or immediately after the confetti-removing apparatus 17 in order to apply a separate opening strip or the like over the exposed end of the partly provided emptying hole. Alternatively, the packing and filling machine 14 may include an apparatus (not shown) for applying a water-repellent impregnation agent for covering and protecting the exposed fibre incision edges within the regions of the above-mentioned emptying holes.

**[[0042]]** Finally, the packing and filling machine 14 may also be equipped with or connected to an apparatus (not shown) placed at the discharge end of the packing and filling machine and with which separate opening arrangements may be applied on the finished packages over the (possibly covered) emptying holes prepared in the package wall.



[[0043]] Suitable opening arrangements for this purpose are previously known to persons skilled in the art and occur in a multiplicity of different forms and configurations. Each type of such opening arrangement capable of facilitating puncturing and/or removal of the arrangements sealing the hole, including the aluminum foil, may be employed in the present invention.

[[0044]] With reference to Figs. 4 and 5A-5C, one particularly preferred embodiment of the method according to the present invention will now be described in connection with a packaging blank of a laminated packaging material with the structure which is schematically shown in Fig. 4. The same reference numerals as previously employed have been employed for the same or corresponding components in Figs. 4 and 5. However, in certain cases lower case letters have been added after the reference numeral in order to designate separate parts of the relevant components.

[[0045]] Fig. 4 thus schematically shows a cross section of a sheet- or web-shaped packaging blank of a laminated packaging material carrying the generic reference numeral 13. The packaging blank 13 includes, in this example, a paper or paperboard layer 13a and outer, liquid-tight coatings 13b and 13c on both sides of the paper or paperboard layer 13a. Between the paper or paperboard layer 13a and the one outer plastic coating 13c, the packaging blank has an aluminum foil 13d which serves as oxygen gas barrier and which is bonded to the paper or paperboard layer 13a by means of an interjacent layer 13e of sealing plastic or

adhesive of known type. The paper or paperboard layer 13a further has decorative artwork 13f of printing ink which is covered by, but visible through, the outer plastic coating 13b on the other side of the packaging blank 13. While not being particularly shown in Fig. 4, the packaging blank 13 is moreover provided with the desired pattern of crease lines which facilitate folding, and also process-related control markings, so-called bar codes, in register with the printed decorative artwork.

**[[0046]]** A web-shaped packaging blank 13 with the structure illustrated in Fig. 4 is processed according to the preferred embodiment of the present invention in the manner which is schematically illustrated in Figs. 5A-5C for producing packages provided with opening arrangements of the type which has an emptying hole prepared in the package wall through which the packages are intended to be emptied of their contents.

**[[0047]]** The web-shaped packaging blank 13 is unwound from a magazine reel 13" placed at the packing and filling machine 14 (Fig. 3), and is led to a laser apparatus 16 which directs a laser beam 20 (Fig. 5A) of adjustable wavelength and intensity at the one side of the passing packaging laminate 13 in order to cut an incision along a line corresponding to the desired opening contour of the emptying hole in the package wall. By the correct setting of the wavelength and intensity of the laser beam 20, the laser beam 20 burns or cuts through the outer plastic coating 13b and the paper or paperboard layer 13a down to, but not through, the subjacent

[[0048]] The thus incised packaging blank 13 is thereafter led further to the confetti-removing apparatus 17 (Fig. 3) where those parts 21 of the packaging blank which are defined by the incision lines 22 are removed by suction or drawing off by means of vacuum (schematically illustrated by arrows in Fig. 5C) for the formation of emptying holes 23 partly through-going in the packaging blank 13 and closed from beneath by the intact aluminum foil 13d of the packaging blank 13, including the outer plastic coating 13c.

[[0049]] In order to facilitate and make for a reliable removal of the parts 21 from the packaging blank 13 by suction or drawing, the packaging blank is heated immediately prior to or in connection with this suction or drawing operation, as illustrated in Fig. 5B, by selective induction heating by means of induction heater elements 24 which heat the aluminum foil 13d directly to a suitable temperature for melting or softening the layer 13e of sealing plastic or other suitable adhesive. As a result of this induction heating, moisture present in the packaging blank (moisture content of approx. 5-7%) is forced down towards the aluminum foil, where the moisture reverses and, by a so-called blistering phenomenon, assists in releasing the confetti fraction 21 from the packaging blank 13.

**[[0050]]** The combination of laser cutting and removal by suction or drawing during simultaneous heating of the packaging blank within selected areas in the method according to the present invention enjoys the unique advantage that it may be applied on a running packaging web without requiring any complicated extra equipment for guiding the cutting laser beam in register with the pre-printed decorative artwork and the crease lines of the packaging blank. Moreover, it ensures an efficient and rapid processing of the packaging web at the same time as it has an inherent ability to be able to be adapted for accommodating varying types and configurations of emptying holes while in ongoing operation, without the packaging web needing to be stopped or operation otherwise needing to be disrupted for such a switching operation.

**[[0051]]** It will thus be apparent from the foregoing description that the present invention satisfies the previously established objects and needs and makes for the production of packages provided with emptying arrangements in a simple, efficient manner using existent conventional equipment. While the present invention has been described in particular with reference to a packaging blank including an aluminum foil serving as a gas barrier, the present invention is naturally not restricted exclusively to such packaging blanks. Instead of an aluminum foil, the packaging blank could just as well include a coating of aluminum applied by vacuum deposition. To a person skilled in the art, it will further be obvious that other metals than aluminum may also be employed as gas barrier in the packaging



**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**  
(Includes Reference to Provisional and International (PCT) Applications)

Attorney's Docket No.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (IF ONLY ONE NAME IS LISTED BELOW) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (IF PLURAL NAMES ARE LISTED BELOW) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

A METHOD OF PRODUCING A PACKAGING CONTAINER PROVIDED WITH AN OPENING ARRANGEMENT

The specification of which (check only one item below):

☒ is attached hereto.☐ was filed as United States Patent Application Number \_\_\_\_\_

on \_\_\_\_\_

and was amended on \_\_\_\_\_ (if applicable).

☒ was filed as International (PCT) Application Number PCT/SE00/01833on 21 September 2000 (21.09.2000)

and was amended on \_\_\_\_\_ (if applicable).

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE.

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE U.S. PATENT AND TRADEMARK OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than six months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code, §§ 119 (a)-(e) of any foreign application(s) for patent or inventor's certificate or of any International (PCT) Application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International (PCT) Application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

**PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119:**

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. §119
<u>Sweden</u>	<u>9903415-9</u>	<u>22 September 1999 (22.09.2000)</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

(APPLICATION NUMBER)

(FILING DATE)

(APPLICATION NUMBER)

(FILING DATE)



BDSM (10/00)